



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H04N 7/16, 5/445, 7/173</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/05886</b>  <b>(43) International Publication Date:</b> 3 February 2000 (03.02.00)		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <b>(21) International Application Number:</b> PCT/IB99/01350  <b>(22) International Filing Date:</b> 20 July 1999 (20.07.99)   <b>(30) Priority Data:</b>            98401837.4                      20 July 1998 (20.07.98)                      EP   <b>(71) Applicant (for all designated States except US):</b> CANAL+ SOCIETE ANONYME [FR/FR]; 85/89, quai André Citroën, F-75711 Paris Cedex 15 (FR).   <b>(72) Inventor; and</b>  <b>(75) Inventor/Applicant (for US only):</b> AGASSE, Bernard [FR/FR]; Les Aquarelles 1, Les Raynes Brunes, F-95610 Eragny/Oise (FR).   <b>(74) Agents:</b> COZENS, Paul, Dennis et al.; Mathys &amp; Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).         </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).   <b>Published</b>  <i>With international search report.</i> </td> </tr> </table>			<b>(21) International Application Number:</b> PCT/IB99/01350 <b>(22) International Filing Date:</b> 20 July 1999 (20.07.99)  <b>(30) Priority Data:</b> 98401837.4                      20 July 1998 (20.07.98)                      EP  <b>(71) Applicant (for all designated States except US):</b> CANAL+ SOCIETE ANONYME [FR/FR]; 85/89, quai André Citroën, F-75711 Paris Cedex 15 (FR).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> AGASSE, Bernard [FR/FR]; Les Aquarelles 1, Les Raynes Brunes, F-95610 Eragny/Oise (FR).  <b>(74) Agents:</b> COZENS, Paul, Dennis et al.; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).	<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(21) International Application Number:</b> PCT/IB99/01350 <b>(22) International Filing Date:</b> 20 July 1999 (20.07.99)  <b>(30) Priority Data:</b> 98401837.4                      20 July 1998 (20.07.98)                      EP  <b>(71) Applicant (for all designated States except US):</b> CANAL+ SOCIETE ANONYME [FR/FR]; 85/89, quai André Citroën, F-75711 Paris Cedex 15 (FR).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> AGASSE, Bernard [FR/FR]; Les Aquarelles 1, Les Raynes Brunes, F-95610 Eragny/Oise (FR).  <b>(74) Agents:</b> COZENS, Paul, Dennis et al.; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).	<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>			
<b>(54) Title:</b> NAVIGATION SYSTEM FOR A MULTICHANNEL DIGITAL TELEVISION SYSTEM				
<b>(57) Abstract</b>  <p>Viewed from one aspect, the present invention provides a digital television system comprising a transmission means for transmitting a plurality of television channels and a decoder for receiving the plurality of channels and characterised in that one channel is used to carry audiovisual information (100) regarding programmes or services available on some or all of the other channels, the decoder being adapted to generate and display interactive messages (101) superimposed over and synchronised with the information regarding some or all of the other channels. From another aspect the system is characterised in that the decoder is adapted to display a service menu (61) providing access to one or more channels or service channels, access to one or more of said channels or service channels proceeding via at least one subsidiary menu accessed by the service menu.</p>				

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Republic of Korea	PT	Portugal		
CU	Cuba	LC	Kazakhstan	RO	Romania		
CZ	Czech Republic	LI	Saint Lucia	RU	Russian Federation		
DE	Germany	LK	Liechtenstein	SD	Sudan		
DK	Denmark	LR	Sri Lanka	SE	Sweden		
EE	Estonia		Liberia	SG	Singapore		

**NAVIGATION SYSTEM FOR A MULTICHANNEL DIGITAL TELEVISION  
SYSTEM**

- 5     The present invention relates to a multichannel digital television system and, in particular, aspects of a system relating to navigation between channels.

One of the advantages of digital television lies in the number of channels that are available in such systems and the flexibility that is available to the television service  
10    provider regarding what channel choices may be made available to a subscriber of the service. Other than a standard set of subscription channels, the system may also include other access controlled channels such as, for example, a pay-per-view channel enabling a subscriber to pay for a particular film, sporting event etc.

- 15    In addition, the digital television system may allow access by the viewer to a number of other interactive type services, such as text based programme guides, weather maps etc. These services may be associated with dedicated digital television channels used to carry the information. Other additional menu based services may be provided enabling a user to access certain basic information in a series of pull down menus  
20    whilst watching a broadcast programme. These services operate using so-called "pilot" information carried in the same channel as a normal audiovisual channels.

Whilst the viewer benefits from the increased choice available, the large numbers of channels and services that are available may prove distracting and, in practice, a  
25    viewer may often have difficulty managing the viewing possibilities available. In addition, existing navigation tools often fail to handle correctly the interface between the navigator and access controlled channels, some of which may not be available to a particular user.

- 30    It is an object of the present invention in its broadest and/or specific aspects to overcome some or all of these problems and to facilitate the navigation of the channels by a user whilst respecting access control restrictions.

-2-

According to a first aspect of the present invention, there is provided a digital television system comprising a decoder adapted to display a plurality of digital television channels in a mosaic formation characterised in that access rights to a programme or channel are received and analysed by the decoder in determining  
5 whether to permit or prohibit full audio and visual access by the user to that programme or channel when displayed in a mosaic window.

The use of mosaic format displays of available channels to aid channel navigation is known in the field. However, such mosaic tools allow full access by a user to all  
10 available channels, albeit in a reduced form. If digital audio for this channel is also available a user can watch and listen, for example, to the entire of a programme normally only available upon special subscription or payment but here displayed in one window of the mosaic display. The present invention overcomes this problem.

15 The access rights in formation may be used by the decoder in a number of ways. For example, in an implementation where a cursor is used to select a desired channel and audio information is generated by the decoder in response to the positioning of the cursor, the decoder may be adapted to permit or prohibit the generation of audio information for an access controlled programme or channel.

20 Audio information may be disabled for access controlled programmes or channels at all times if the decoder does not have the associated access rights. Alternatively, audio information may be prohibited if the cursor is positioned on a prohibited mosaic window for longer than a predetermined length of time.

25 Alternatively, or in addition, the decoder may simply prohibit the generation of video information in a mosaic window in dependence on the access rights associated with the programme or channel normally displayed in that window.

30 In yet a further embodiment, the interaction of the cursor with a mosaic window may depend on the access rights associated with the programme or channel displayed in that window. For example, the decoder may be adapted to automatically re-position

-3-

the cursor in the event that the cursor is placed on a prohibited mosaic window corresponding to an access controlled programme or channel.

5 This re-positioning may be carried instantaneously, in the sense that the decoder does not allow a cursor to be positioned directly on an access controlled programme or channel displayed in a mosaic window. Alternatively, the repositioning may be carried out after the expiry of a predetermined period of time. In the case, for example, where an audio soundtrack is activated if a window is highlighted by a cursor, this time delay allows a user to have full access to a sample of programme  
10 for a period of time to enable the user to evaluate the interest of this programme.

In addition or as an alternative to the above steps, the decoder may also be adapted to generate a message informing a user of the lack of access rights to a programme or channel in the event of the placement of the cursor on a prohibited mosaic  
15 window.

The invention further extends to a digital television system comprising a transmission means adapted to transmit access rights data together with the audiovisual data used to create the mosaic. This information may comprise a configuration list, updated  
20 every 24 hours or so and listing the access rights for programmes to be broadcast for the next 24 hour period. Upon reception of the list, the decoder may compare the access rights with the rights available to the decoder before carrying out the steps described above.

25 The transmission means may further be adapted to receive audiovisual information from a plurality of channels and to process this information in dependence on the access rights to each programme or channel forming the mosaic. For example, in the case of an adult emission or an adult channel, it may be preferable to simply black out at all times the corresponding mosaic window that should show this channel. As  
30 will be appreciated, this may be carried out in addition or as an alternative to the steps carried out at the decoder to limit the mosaic display and/or movement of the cursor.

-4-

According to a second aspect of the present invention there is provided a digital television system comprising a decoder and characterised in that the decoder is adapted to display a service menu providing access to at least one of a plurality of channels comprising a channel and a service channel, access to said at least one of a plurality of channels proceeding via at least one subsidiary menu accessed by the service menu.

In a related aspect, the present invention provides a digital television system comprising a decoder and characterised in that the decoder comprises means, such as an application, for display a service menu providing access to at least one of a plurality of channels comprising a channel and a service channel, access to said at least one of a plurality of channels proceeding via at least one subsidiary menu accessed by the service menu.

The advantage of a single service menu and an arborescence of one or more subsidiary menus lies in the provision of a single point of access to all channels and service channels accessible to the user. Organising the channels in a series of subsidiary menus enables information to be grouped in an efficient manner behind the main service menu.

In one embodiment, access to one or more channels or service channels proceeds via at least a second subsidiary menu accessible via the first subsidiary menu. The use of a multiple hierarchy of service menus is particularly advantageous in organising a large number of channels in a rational manner. In some cases, for example, where there are only a limited number of channels, a single hierarchy layer of subsidiary menus immediately behind the main service menus may be sufficient.

Advantageously, the decoder is adapted to access a service channel at a particular display screen within that service channel in dependence on the option chosen within a subsidiary menu. For example, in the case of a service channel carrying an electronic programme guide, a user may navigate a number of sub-menus specifying what information he is interested in, after which the decoder changes channel and

jumps immediately to the page of the programme guide of the most interest to the user. This is particularly advantageous where the service and subsidiary menus are superimposed over a transmission as will be described below, since the step of changing channel is reserved until the last moment.

5

In this context, the term "service channel" is used to refer to those digital channels dedicated to carrying text and/or static image data such as, for example, a digital channel or channels that carry data used by the decoder to assemble a full electronic programme guide, or a channel dedicated to providing a shopping catalogue or the like. The term "channel" is inclusive of this term and also includes the more standard real-time broadcast audiovisual programme channels.

10

Advantageously, the decoder is adapted to display the service menu and subsidiary menu or menus superimposed over information transmitted on one or more channels or service channels. In this way, the user may navigate the service and sub-menus whilst continuing to watch a programme transmitted on a given channel.

15

In one embodiment, the information contained in the service and subsidiary menus may be largely unchanging, for example, comprising a list of channel choices that do not change on a day to day basis. Preferably, however, the service menu and subsidiary menus further comprise regularly updated information broadcast together with the channel or service channel information over which the menus are superimposed.

20

This information can include basic pilot information representing a minimum of information regarding forthcoming programmes etc. and which may be displayed in the service and subsidiary menus without having to re-tune the decoder to a dedicated electronic programme guide channel. In order to provide a uniform menu interface across all channels, the digital television system preferably further comprises transmission means in particular adapted to broadcast update information for the service menu or menus on substantially all channels and service channels.

25

30

-6-

Preferably, the digital television system further comprises a remote control handset associated with the decoder, the decoder being adapted to display the service menu in response to the touch of a single dedicated key on the handset.

- 5 This aspect of the present invention also provides a method of accessing at least one of a plurality of channels comprising a channel and a service channel of a digital television system, said method comprising the steps of:
- displaying a service menu;
  - accessing at least one subsidiary menu by the service menu; and
  - 10 accessing said at least one of a plurality of channels by said at least one subsidiary menu.

According to a third aspect of the invention, the present invention comprises a digital television system comprising a transmission means for transmitting a plurality of  
15 television channels and a decoder for receiving the plurality of channels and characterised in that one channel is used to carry audiovisual information regarding programmes or services available on at least some of the other channels, the decoder being adapted to generate and display interactive messages superimposed over and synchronised with the information regarding said at least some of the other channels.

20 In a related aspect, the present invention provides a digital television system comprising a transmission means for transmitting a plurality of television channels and a decoder for receiving the plurality of channels and characterised in that one channel is used to carry audiovisual information regarding programmes or services  
25 available on at least some of the other channels, the decoder comprising means for generating and displaying interactive messages superimposed over and synchronised with the information regarding said at least some of the other channels.

In this context the term "interactive message" refers to any request message to which  
30 a user may respond in order to trigger an action in the decoder. In one embodiment, the decoder is adapted to change to another channel in response to a positive reply by a user to an interactive message. For example, where an announcer is describing on



-7-

the overview channel a programme starting soon on another channel, an interactive message may be displayed asking a user if he or she wishes to change to the channel in question.

- 5 In the case where the overview channel is describing a functionality or offer available on a service channel, for example, the decoder may be preferably adapted to change to a predetermined display screen of a service channel in response to a positive reply. For example in the case of an overview of a product available on a shopping channel, the decoder may be adapted to jump directly to the display screen associated with the  
10 product described by the announcer on the overview channel.

- In other embodiments, the decoder is adapted to carry out payment steps in response to a positive reply by a user to an interactive message. These payment steps can include debiting of a credit value, generation of a subscription request to a central  
15 modem. These steps may be associated with messages related to watching pay-per-view film on an access control channel, directly ordering a product described on a shopping channel etc.

- Other actions carried out by the decoder can include the setting of a timer to remind  
20 the user of a forthcoming programme when it occurs etc.

- Advantageously, the decoder is adapted when tuned to the guide channel to permanently display a service menu providing access to the channels and service channels received by the decoder. The aim of an overview channel is to encourage  
25 navigation by a user through the available channels and options of the service. In addition to responding to specifically generated interactive messages a user may also be prompted by the information appearing on the overview channel to navigate to other channels and service channels via a service menu of this kind.

- 30 Preferably, the decoder is adapted to display the service menu in an inactive form. This is to avoid, for example, inadvertently selecting an option in the service menu channel when replying to a specifically generated interactive message. In a similar

manner, the decoder is preferably adapted to suppress interactive messages and/or ignore responses to such messages when the service menu is activated e.g. via a dedicated touch on a decoder remote control.

5 This aspect of the present invention further provides a method of providing information access in a digital television system, said method comprising the steps of:

receiving a plurality of television channels, one channel being used to carry audiovisual information regarding one of programmes and services available on at least some of the other channels; and

10 generating and displaying interactive messages superimposed over and synchronised with the information regarding said at least some of the other channels.

As will be understood, some or all of the above aspects of the invention may be combined. For example, the mosaic channel and/or overview channel described  
15 above may be broadcast in the same system and, indeed, may be accessible via service and subsidiary menus of the kind described above.

Features described above relating to apparatus aspects of the present invention can also be applied to method aspects, and vice versa.

20 As used herein, the term "digital television system" includes any transmission system for transmitting or broadcasting for example primarily audiovisual or multimedia digital data. Whilst the present invention is particularly applicable to a broadcast based digital television system, the invention may also be applicable to a fixed  
25 telecommunications network for multimedia internet applications, to a closed circuit television network, and so on. The term equally includes a system using any satellite, terrestrial, cable or other communication link.

The term "decoder" or "receiver/decoder" used herein may connote a receiver for  
30 receiving either encoded or non-encoded signals, for example, television and/or radio signals, which may be broadcast or transmitted by some other means. The term may also connote a decoder for decoding received signals. Embodiments of such

receiver/decoders may include a decoder integral with the receiver for decoding the received signals, for example, in a "set-top box", such a decoder functioning in combination with a physically separate receiver, or such a decoder including additional functions, such as a web browser or a video recorder or a television.

5

There will now be described, by way of example only, a preferred embodiment of the present invention, with reference to the attached figures, in which:

10

Figure 1 shows a digital television system as may be adapted according to the present invention;

Figure 2 shows an overview of the elements of a decoder for use in a digital television system;

15

Figure 3 shows a handset remote control for use with the decoder of Figure 2;

Figure 4 shows a scrolling sequence of screen displays associated with a main service menu;

20

Figure 5 shows a sequence of screen displays associated with selection of a first and second layer of subsidiary menus within the main service menu;

Figure 6 shows a further sequence of screen displays associated with selection of subsidiary menus within the main service menu;

25

Figure 7 shows a sequence of screen displays associated with selection of sub-menus and change of channel to a dedicated programme guide channel;

30

Figure 8 shows a sequence of screen displays associated with a mosaic or grille of channels;

Figure 9 shows the elements of a transmission system associated with the generation

of the mosaic of Figure 8;

Figure 10 shows a sequence of screen displays associated with a dedicated overview or guide channel; and

5

Figure 11 shows a sequence of screen displays associated with the activation of the service menu within the guide channel of Figure 10.

10 An overview of a digital television system 1 according to the present invention is shown in Figure 1. The invention includes a mostly conventional digital television system 2 that uses the known MPEG-2 compression system to transmit compressed digital signals. In more detail, MPEG-2 compressor 3 in a broadcast centre receives a digital signal stream (typically a stream of video or audio signals). The compressor 3 is connected to a multiplexer and scrambler 4 by a linkage 5.

15

The multiplexer 4 receives a plurality of further input signals, assembles one or more transport streams and transmits compressed digital signals to a transmitter 6 of the broadcast centre via a linkage 7, which can of course take a wide variety of forms including telecommunications links. In this example, the transmitter 6 transmits  
20 electromagnetic signals via uplink 8 towards a satellite transponder 9, where they are electronically processed and broadcast via a notional downlink 10 to earth receiver 12, conventionally in the form of a dish owned or rented by the end user. The signals received by receiver 12 are transmitted to an integrated receiver/decoder 13 owned or rented by the end user and connected to the end user's television set 14.  
25 The decoder 13 decodes the compressed MPEG-2 signal into a television signal for the television set 14.

In a multichannel system, the multiplexer 4 handles audio and video information received from a number of parallel sources and interacts with the transmitter 6 to  
30 broadcast the information along a corresponding number of channels. In addition to audiovisual information, messages or applications or any other sort of digital data may be introduced in some or all of these channels and interlaced with the transmitted

-11-

digital audio and video information.

5 A conditional access system 15 is connected to the multiplexer 4 and the receiver/decoder 13, and is located partly in the broadcast centre and partly in the decoder. It enables the end user to access digital television broadcasts from one or more broadcast suppliers. A smartcard, capable of deciphering messages relating to commercial offers (that is, one or several television programmes sold by the broadcast supplier), can be inserted into the receiver/decoder 13. Using the decoder 13 and smartcard, the end user may purchase commercial offers in either a subscription mode  
10 or a pay-per-view mode.

As mentioned above, programmes transmitted by the system are scrambled at the multiplexer 4, the conditions and encryption keys applied to a given transmission being determined by the access control system 15. Transmission of scrambled data  
15 in this way is well-known in the field of pay TV systems. Typically, scrambled data is transmitted together with a control word for descrambling of the data, the control word itself being encrypted by a so-called exploitation key and transmitted in encrypted form.

20 The scrambled data and encrypted control word are then received by the decoder 13 having access to an equivalent of the exploitation key stored on a smart card inserted in the decoder to decrypt the encrypted control word and thereafter descramble the transmitted data. A paid-up subscriber will receive, for example, in a broadcast monthly EMM (Entitlement Management Message) the exploitation key necessary to  
25 decrypt the encrypted control word so as to permit viewing of the transmission.

An interactive system 16, also connected to the multiplexer 4 and the receiver/decoder 13 and again located partly in the broadcast centre and partly in the decoder, enables the end user to interact with various applications via a modem back  
30 channel 17. The modem back channel may also be used for communications used in the conditional access system 15. An interactive system may be used, for example, to enable the viewer to communicate immediately with the transmission centre to

-12-

demand authorisation to watch a particular event, download an application etc.

Referring to Figure 2, the elements of the receiver/decoder 13 or set-top box adaptable to be used in the present invention will now be described. As will be understood, the elements of this decoder are largely conventional and their  
5 implementation will be within the capabilities of one skilled in the art.

As shown, the decoder 13 is equipped with several interfaces for receiving and transmitting data, in particular an MPEG tuner and demultiplexer 20 for receiving  
10 broadcast MPEG transmissions, a serial interface 23, a parallel interface 24, and a modem 25 for sending and receiving data via the modem channel 17. In this embodiment, the decoder also includes a first and second smart card reader 26 and 27, the first reader 26 for accepting a subscription smart card containing decryption keys associated with the system and the second reader 27 for accepting bank cards or  
15 other specialised cards.

The decoder also includes a receiver 28 for receiving infra-red control signals from a handset remote control 29 and a Peritel output 30 for sending audiovisual signals to the television 14 connected to the decoder.

20 Processing of data within the decoder is handled by a central control unit 31. The software architecture of the control unit may correspond to that used in a known decoder and will not be described here in any detail. It may be based, for example, on a virtual machine interacting via an interface layer with a lower level operating  
25 system implemented in the hardware components of the decoder. In terms of the hardware architecture, the decoder will be equipped with a processor, memory elements such as ROM, RAM, FLASH memory etc. as in known decoders.

The control unit 31 may be adapted to run a number of applications defining the  
30 functionality of the decoder. An application introduced into the decoder corresponds to a section of code introduced into the machine that permits the control, for example, of higher level functions of the machine. Typical applications may include the

-13-

generation of a graphic sequence on the screen of the television display in response to a command from the remote control, or the emission of a message via the decoder modem to the server associated with the digital broadcast system.

- 5 As will be later described, an application according to the present invention is adapted to generate display screens and menu information laid over or replacing the normal television display and associated with navigation between a number of channels or interactive services proposed by the system. The information displayed may comprise substantially invariable menu data and/or data updated using information contained
- 10 in the MPEG transport stream of one or more channels.

Applications may be resident applications stored in the ROM or FLASH of the decoder or applications broadcast and downloaded via the MPEG interface 20 of the decoder or, indeed, any other interface of the decoder such as the serial port 23, a

15 smart card reader 27 etc. Applications can include navigation tools, program guide applications, games, interactive services, teleshopping applications, as well as initiating applications to enable the decoder to be immediately operational upon start-up and applications for configuring the decoder.

- 20 Applications are stored in memory locations in the decoder and represented as resource files comprising graphic object description files, unit files, variables block files, instruction sequence files, application files, data files etc.

Conventionally, applications downloaded into the decoder via the broadcast link are

25 divided into modules, each module corresponding to one or more MPEG tables. Each MPEG table may be divided into a number of sections. In the case where data transfer also occurs via the serial and parallel ports, modules are similarly split into tables and sections, the size of the sections depending on the channel used.

- 30 In the case of broadcast transmission, modules are transported in the form of data packets within respective types of data stream, for example, a video data stream, an audio data stream, a text data stream. In accordance with MPEG standards each

-14-

packet is preceded by a Packet Identifier (PID) of 13 bits, one PID for every packet transported in the MPEG stream. For a given frequency channel, one or more programme map tables (PMTs) contain a list of the different data streams within that channel and define the content of each stream by reference to its respective PID. The  
5 PMT table or tables are accessible via a principal Programme Access Table (PAT).

In a digital broadcast system, information is carried on a plurality of frequency channels of a fixed and predetermined bandwidth. Within a single frequency channel, a plurality of audio and/or visual data streams may be contained. For example, a  
10 single video stream may be associated with a plurality of audio streams, dubbing the programme into a number of languages. Alternatively or in addition, multiple video streams may be contained in the packet stream associated with the frequency channel and showing, for example, the same sporting event from different camera positions. Whilst these different audio and video streams are broadcast within the same  
15 frequency channel, the viewer may perceive changing the audio/video stream within that frequency channel as corresponding to a real change of channel.

In addition to conventional audiovisual programme information, other data may be carried in a frequency channel. As will be described below, this data may include  
20 menu display information associated with up-dated programme summaries etc. The PID values of such data may again be available via a PMT table.

In order to provide a constant interface, some information is of necessity broadcast on all frequency channels. For example, the information associated with a "Pilot"  
25 type application indicating basic programme information and options available to a user may be broadcast on all frequency channels, such that a user may always call up this information, regardless of the programme or channel being watched. In this way, continuity of the interface is assured.

30 Referring to Figure 3, the set of controls associated with the remote control handset 29 of the receiver/decoder will now be described. This remote control layout corresponds to that currently supplied with the existing Canal+ Mediahighway digital



-15-

decoder system. As will be understood, the response by the decoder to the activation of a particular control on the handset is programmable and may vary according to the application loaded in the decoder. Thus, while certain functions (on/off, mute etc.) are universal, others may change according to the decoder configuration.

5

As shown, the handset 29 includes a PROG control 40 and PILOT control 41. In the existing Canal+ Mediahighway decoder system, these controls respectively call up a programme guide listing the programmes available on each channel and a pilot application giving information regarding the programme being watched on the present channel as well as a certain amount of information regarding other programmes to be shown on this and other channels at that moment, in the near future etc.

10

In the context of present application, and as will be discussed below, activation of the PROG control 40 of the handset calls up a more generalised main service menu, the programme guide being accessible as an option within this menu, alongside other services such as interactive shopping applications etc. The application called up by the PILOT control 41 remains largely unchanged.

15

The handset further includes a set of directional navigation buttons 42 for controlling movement of an on-screen cursor within a menu display, as well as an "OK" control button 43 for selection of an item highlighted by the cursor.

20

A set of numerical buttons 44 enable direct selection of a numbered channel, entry of numerical data such as credit card numbers etc. The numerical controls 44 may also be associated with entry of a secondary set of data, such as the days of the week, day/night/evening etc. This data may be printed above the controls and can be used when programming a timer application, navigating a programme guide etc.

25

The handset 29 further includes a preference control button 45 giving access to a menu list of a limited number of preferred channels, as chosen by the user. In this way, the user can channel quickly between the channels that he or she watches the most often. The control button 46 is used to exit from an activated application or

30

display menu.

The SERV control button 47 is used to call up a summary of the services available within an activated application, such as a users guide to a shopping application.

5

The “+” control button 48 gives access to a menu permitting choice of sub-titles in a number of languages and/or choice of language used in the audio soundtrack accompanying the displayed programme.

- 10 The PERSO control button 49 calls up an application enabling a user to set and personalise certain basic functions of the decoder, including the volume of the audio output from the decoder, characteristics of the video output of the decoder etc.

- 15 The A to E control buttons 49 are not generally associated with a particular type of function but may be used by certain applications and at the option of the programmer to activate particular functions such as return to a previous menu etc.

- 20 Finally, the mute control button 50 deactivates or activates the sound accompanying the displayed channel, the TV/SAT control 51 enables the user to switch between channels received via a satellite input and those received via a terrestrial antenna, and the standby button 52 enables the user to remotely switch the decoder on and off.

- 25 Referring to Figure 4, the service menu 61 displayed by the application upon activation of the touch PROG 40 in the present embodiment will now be described. As shown, the menu 61 comprises a list of services available to the user and is displayed superimposed over the television programme 60 broadcast on the channel in question. The list displayed may vary according to the subscription rights of the user and may equally be ordered contextually in dependence on the channel presently being watched and/or in dependence on the preferences of the user. As shown, in the present case, the menu provides access to the following groups of services:
- 30

-17-

	"Forum Boutiques"	Interactive shopping channel
	"Service des Chaînes"	Specialised Service Channels
	"Mosaïque des Chaînes"	Mosaic Channel Display (see below)
	"PERSONNEL"	Personalised Services
5	"Jeux"	Interactive Games
	"Radios"	Digital Radios

The menu 61 is a thematic menu and, as will be described, is associated with an arborescence of menu choices behind the services indicated. In some cases, selection of a menu title, such as "Jeux" or "Mosaïque des Chaînes", may lead directly to a change of channel. In such cases, the programme 60 shown behind the menu 61 in Figure 4 will be replaced. In other cases, such as "Guide des Programmes", "Service des Chaînes", selection of the title may lead to the display by the application of a further sub-menu superimposed over the programme presently being watched.

Of course, even after the channel has been changed, the user may be presented with a further menu choice. For example, in the case of the selection "Radios" a plurality of audio streams may be sent in the same frequency channel, the user being presented with a further visual menu to enable selection of the desired radio station within that channel. Similarly, in the case of the "Jeux" channel, the user may choose to download one of a plurality of games, all broadcast continuously in the same frequency channel.

As shown in the lower two representations of Figure 4, the service menu 61 scrolls around a fixed bar 62 in response to commands received from the navigation keys 42 of the remote control handset 29. The bar may include additional information, such as navigational arrows showing the possible directions of movement of the menu. Unlike conventional menu displays, where a movable cursor is displaced around a fixed menu display, the menu itself moves in response to the activation of the navigation keys 42.

As shown at 62, in response to a first downward navigation command the menu shifts

-18-

to the title "Forum Boutiques", the previous title being displaced above the fixed bar 63 and the next title to the right of the menu scrolling over to the queue of titles on left hand side. At the same time, the menu bar 62 displays up and down navigational arrows to indicate that the menu may be scrolled in either direction.

5

If the user again presses a downward navigation control, the menu then scrolls to the next title "Service des Chaînes" as shown at 64. Again, the immediate title to the right of the menu moves over to the left hand queue.

10 A user may select the menu title presently highlighted in the menu bar by pressing the OK control button 43 on the remote control handset. Referring to Figure 5, the user selects the "Guide des Programmes" title shown in the uppermost frame, leading to the subsidiary or sub-menu 65 shown in the second frame of Figure 5. This operation occurs over the background of the presently watched programme i.e. the  
15 channel does not change. Within the sub-menu 65, the user may choose to access information relating to forthcoming programmes classified according to their genre ("Par Genre") or according to the channel on which they are broadcast ("Par Chaîne"). The sub-menu may also include the option of accessing a full electronic programme guide ("Le Magazine").

20

In addition to navigation down the menu 65, as indicated by the downward arrow, a user may equally navigate backwards to the previous menu 61 using the navigation button 42 corresponding to the left facing horizontal arrow shown above the menu 65.

25 In the case that the user selects summary information relating to the genre of forthcoming programmes, the user will be presented with another menu 66 shown in the lowermost frame of Figure 5 and classifying programmes as relating to films, sport, youth culture, documentary etc.

30 As shown in the first frame of Figure 6, the user has in this case indicated that he wishes to receive summary information regarding programmes classified as films. In this case, he is presented with a menu asking if he wishes to receive summary

-19-

information regarding films immediately forthcoming ("tout de suite") or films to be shown in a later time slot ("ce soir"). As shown at 68 in the second frame, this menu is itself scrollable to a second position to select films in a later time slot.

5 If the user selects one of these options, the film information shown at 69 in the lower frame of Figure 6 will then be displayed. In this case, summary information regarding films shown on two of available channels in the later time slot is displayed. This display 69 may also be scrolled downwards to look at summary information relating to films displayed on other channels during this time slot.

10

As will be appreciated, the decoder continues to receive audiovisual information broadcast along the original channel selected by the user during all these operations and the backing display 60 continues to show the programme being broadcast on that channel. The data needed to create the menus and up to date programme summary  
15 information may be encapsulated in supplementary digital packets sent together with the audiovisual information in the packet stream of that channel. In order to enable the user to access these menus and sub-menus regardless of the channel being watched it is necessary for this data to be transmitted on substantially all channels. The data used in this case may correspond to the type of data accessible via the "Pilot"  
20 application which is available on all channels (see above).

All of the above menus and sub-menus access information available within the decoder or broadcast generally on a number of channels. In some cases, however, access to services and information via the main service menu 61 via one or more sub-  
25 menus may be associated with a change to a dedicated digital channel. For example, activation of the "Forum Boutique" or "Mosaïque des Chaînes" option in the menu bar may cause the decoder to switch to a dedicated digital channel carrying specific information.

30 In particular, in the event that a user selects the option "Le Magazine" in the sub-menu associated with the "Guide des Programmes" (Figure 5, frames 1 and 2) the sub-menu 70 shown in the first frame in Figure 7 will be displayed. In this sub-

-20-

menu, the user is presented with a choice of accessing the magazine via a thematic menu ("Par Genre") or via a channel menu ("Par Chaîne"). As will be noted, during the display of the sub-menu 70, the decoder remains tuned to the first digital channel, the sub-menu 70 being displayed superimposed over the channel display 60.

5

As shown in the second frame of Figure 7, if the user has picked the thematic choice "Par Genre", the sub-menu 71 will be displayed, giving the user the option to select which type of programme (film, sport, nature etc.) he wishes to read about in the magazine.

10

If the user then selects the genre "Film", the decoder then switches to the frequency channel containing the magazine and accesses the magazine at a page giving details of a forthcoming film, as shown at 72 in the final frame of Figure 7. As will be understood, the location of information within the transport stream on a given frequency channel is provided by the PMT etc. tables within the stream and it is a simple matter to organise certain types information into corresponding predetermined PID packets within the stream. The decoder may then directly download and display the information of interest to the user using this PID information.

15

20 In other embodiments, selection of the option "Le Magazine" may cause the decoder to switch directly to the digital channel carrying the magazine information, the user thereafter being presented with a main menu indexing the magazine contents. However, the advantage of using superimposed sub-menus to pre-select the point of access prior to a channel change is that the user jumps straight to the most relevant information at the moment that the channel changes.

25

One of the services offered in the main service menu guide is a grille or mosaic showing the content of all channels currently being broadcast to the decoder. See Figure 4, "Mosaïque des Chaînes". Upon selection of this option, the decoder changes to the frequency channel associated with this service and the grille 80 shown in Figure 8A is displayed. The grille 80 is composed of a number of miniature screen display windows 81 each showing in real time the programme being shown on

30

-21-

a channel and each including at 82 an indication of the name of the channel shown in the display window 81. The grille also includes a general information bar 84.

An application within the decoder generates a movable frame cursor shown at 83.

5 This cursor may be moved horizontally and vertically using the navigation arrows of the remote control. For example, in Figure 8B, the cursor 83 has been moved to select the screen display associated with the third-down, third-across channel. The title of the programme currently being shown on this channel is displayed in the display bar 84. The decoder additionally selects and plays the audio stream  
10 associated with this channel. Pressing "OK" on the remote control then causes the decoder to zap to the chosen channel shown in that element.

The grille shown in Figure 8A displays 20 channels. In practice, up to 60 or more channels may be receivable by the decoder. In this case, access to other programme  
15 grilles may be necessary. For example, when the cursor is positioned as shown in Figure 8A, selection of the left facing navigation arrow will cause the display to change to another mosaic of 20 programmes. Similarly, when the cursor is in the right hand side, selection of the right facing navigation arrow will cause the display to change to show another programme mosaic. The programme mosaic screens may  
20 also be looped such that exit of the last mosaic screen will bring the user back to the first screen etc.

The programme mosaic shown in Figure 8A displays a selection of all programme channels broadcast to the decoder. However, in some cases, the decoder may not  
25 possess full access rights to all channels. For example, some channels may be dedicated to pay per view programming, or may require a further subscription on the part of user. In this case, it is undesirable that a user has full audio and video access to a programme, even to a reduced screen version shown in the display windows 81.

30 Accordingly, in one embodiment the decoder application managing the mosaic display is adapted to monitor the length of time that the frame cursor rests in one position. After a period of, for example, 30 seconds, the application will compare the access

-22-

rights of the channel in question with the access rights in the decoder in order to verify whether or not a user has full access to the programme or channel display in the mosaic window.

- 5 In the event that the user does not have the necessary access rights, the frame cursor will jump to another window in this mosaic, such as the first element in the upper left hand corner of the first screen. Alternatively, the cursor may jump to a window element in a different mosaic. For a period of 5 minutes or so thereafter, the application may refuse to allow the cursor to be repositioned on the access prohibited  
10 window.

- In the event that the decoder does not have the necessary access rights, other means for disabling the display are possible. For example, the application can simply act to cut the audio output after 30 seconds such that the user can no longer hear the  
15 soundtrack associated with that programme. In addition, or alternatively, the application may also act to cut the video output.

- In an alternative to a time out procedure, the application can take the necessary steps to reposition the cursor and/or cut the audio output immediately the cursor rests on  
20 a window element for an access prohibited programme or channel.

- In some cases, for example, where adult material is displayed, the decoder may in all cases black out the video and audio display for the programme and channel in question, such that only the channel and programme title information is displayed in  
25 the bars 84, 82. Since such material may be deleted from all mosaic displays, regardless of the decoder access rights, this step may also be carried out upstream of the decoder at the transmission end (see below).

- Before or after carrying out any of the above actions, the application may propose to  
30 the user the option of paying to access the channel in question. If the user agrees, the application may change directly to the channel in question using, for example, credits stored in the subscription card of the user. Alternatively, the application may



activate payment menu screens needed to allow the user to open a subscription. Such steps are standard, and will not be discussed here in any detail.

5 The decoder may be programmed such that the mosaic channel will always be displayed at start-up of the decoder. Additionally, whilst the cursor may also be fixed on the same channel (for example, a hyperchannel as described below) every time the decoder is activated or a user changes to the mosaic channel, other possibilities exist. For example, when activating the decoder, a mosaic may be displayed with the cursor highlighting the last channel viewed by the user. Equally, when the user changes  
10 from one channel to the mosaic channel, the mosaic screen including this channel highlighted by the cursor may be displayed, providing a sort of "zoom-out" effect from a full-screen channel display to a miniature version in one window element of the mosaic.

15 Referring to Figure 9, the architecture of the elements of the transmission system associated with the generation of the mosaic channel will now be described. Video signals from sixty channels are received by a server 90 associated with a station 91. The server 90 acts to filter out these video signals which are not to be included in the mosaic, for example, video signals associated with adult only channels etc. The  
20 processed signals then pass to a processor 92 which resizes and repositions the video signals within a screen display so as to generate the three grille or mosaic screens shown at 93, which are then fed to the multiplexer 4.

In a similar manner, audio signals from each of the channels are filtered at 94 and  
25 assembled and assigned PID values at 95 before being fed to the multiplexer 4.

In addition to the broadcast audio and visual data, further data may be introduced by an SA/DA injection server 96 and an associated work station 97. In particular, the server and station introduce configuration data relating to the configuration of the  
30 elements in the mosaic (see below) together with pilot data containing the minimum information regarding the programmes broadcast on each channel. The pilot data may correspond to that used by the "Pilot" application and will be used by the

application to generate the header information bar 84 at the top of the mosaic screen.

The configuration data typically includes a description of the number of mosaics, the size and position of each screen element within each mosaic, the desired size of the frame cursor, the limits of the cursor movement. This information will be used to enable the associated decoder application to correctly position and move the frame cursor. In addition, the data includes the position of each channel in the mosaics (page number and coordinates), the PID of the associated audio soundtrack in the assembled audio stream and the channel reference in the pilot data.

10

In order to enable the decoder application to change directly to a desired channel the configuration data should also include the details of the channel (frequency, PID value) associated with a given element. Access details (pay per view, subscription etc.) may also be included in order to enable the decoder application to carry out the operations described above to prevent a user from watching and listening to an access prohibited channel. Finally, the configuration data includes the PID value of each mosaic page and a default header message (if any) associated with that mosaic page.

15

20

The combination of the mosaic channel and service menus described above enable a user to navigate relatively easily and conveniently between, on the one hand, television broadcast channels available and, on the other hand, particular services available on one or more service channels.

25

There will now be described, with reference to Figures 10 and 11, the operation of a dedicated channel adapted to provide an overview or guide to the combined services and/or channels available ("Hyperchaîne" or "hyperchannel").

30

Referring to Figure 10, a particularity of the mode hyperchannel is the permanent display of the service menu 61 over a broadcast audiovisual programme 100. As will be described, the broadcast programme is used to provide a "tour guide" to forthcoming programmes on some or all of the channels as well as describing the services available. The programme may comprise, for example, a pre-recorded video

-25-

broadcast in rotation and changed every 24 hours or so.

Since the channel is dedicated to facilitating navigation between services and channels, the format of the service menu 61 will also be permanently displayed so as to provide a signalled starting point for electronic navigation amongst the services. Although displayed, the service menu 61 is inactive, in the sense that it is necessary to press the PROG control between 40 on the remote control before selecting or passing between the titles listed in the service menu. The inactive state of the service menu is signalled to the user by means of an additional display bar 103 above the service menu 61.

The video programme on the hyperchannel may be broadcast and displayed in synchronism with displayed interactive messages. The programme may concern, for example, a forthcoming film, the details of which are available in the electronic programme guide "Magazine". The data (channel frequency, PID value etc.) needed to access the magazine channel and, in particular, the page of the magazine on which the film is described, are transmitted concurrently with the broadcast video. In synchronism with the broadcast video, the decoder application charged with managing the hyperchannel will display an interactive request message 101 shown in the second frame of Figure 10 inviting the user to change directly to the magazine channel by pressing the "OK" button 43 on the handset. If the user presses "OK" the decoder will then automatically re-tune to the desired channel and page of the magazine.

Other interactive messages referring to available services may be used to enable the user to jump directly to the description of a product on the appropriate page of the "Forum Boutiques" shopping channel etc.

The broadcast video may equally describe a forthcoming film available on a pay per view channel. In such an example, the hyperchannel application in the decoder is adapted to synchronously generate an interactive subscription request message 102 as shown in the lowermost frame of Figure 10. In the event that the user presses "OK" on the handset, the decoder will automatically take the necessary steps to decrement

-26-

a credit value or send a subscription request to a main server in order to enable the user to possess the access rights to view the film. Alternatively, or in addition, if the film is currently being shown or is about to be shown on another channel, the decoder will re-tune and change channel to the appropriate channel. Alternatively, or in addition, the decoder may set a timer to remind the user to watch the film when it occurs.

As will be understood, in view of the synchronism of the hyperchannel application with the broadcast video, and the user of the "OK" button to select services described in the hyperchannel broadcast, it is necessary to deactivate the main service menu 61 during these operations to avoid selecting a title option of the service menu when responding "OK" to an interactive message displayed in synchronism with the hyperchannel broadcast.

If the viewer presses the "PROG" button on the remote control, the service menu will thereafter become active and the instructing display bar 103 will disappear, as shown in the second frame of Figure 11. Thereafter, the user may navigate up and down the service menu using the navigation arrows 42 of the remote control and, in particular, may select a menu title using the "OK" button 43.

When the service menu 61 is in an active mode as shown in Figure 11, the hyperchannel application in the decoder will either stop displaying the interactive messages shown in Figure 10 and/or will not respond to such messages. In this configuration, the decoder responds to an "OK" signal from the remote control only to change to a sub-menu or channel indicated in the service menu or subsidiary menus.

A user may deactivate the service menu and return to responding to interactive messages synchronised with the hyperchannel broadcast by exiting from the menu using button 46 of the handset and/or by pressing the PROG button 40 for a second time.

CLAIMS

1. A digital television system comprising a decoder and characterised in that the  
5 decoder is adapted to display a service menu providing access to at least one of a  
plurality of channels comprising a channel and a service channel, access to said at  
least one of a plurality of channels proceeding via at least one subsidiary menu  
accessed by the service menu.
- 10 2. A digital television system as claimed in claim 1 in which access to said at least  
one of a plurality of channels proceeds via at least a second subsidiary menu  
accessible via the at least one first subsidiary menu.
- 15 3. A digital television system as claimed in claim 1 or 2 in which the decoder is  
adapted to access a service channel at a particular display screen within that service  
channel in dependence on the option chosen within a subsidiary menu.
- 20 4. A digital television system as claimed in any of claims 1 to 3 in which the  
decoder is adapted to display the service menu and at least one subsidiary menu  
superimposed over information transmitted on at least one of a plurality of channels.
- 25 5. A digital television system as claimed in claim 4 in which said at least one service  
menu further comprises regularly updated information broadcast together with the  
channel information over which the menus are superimposed.
- 30 6. A digital television system as claimed in claim 5 further comprising transmission  
means adapted to broadcast update information for said at least one service menu on  
substantially all channels and service channels.
7. A digital television system as claimed in any of claims 1 to 6 further comprising  
a remote control handset associated with the decoder, the decoder being adapted to  
display the service menu in response to the touch of a single dedicated key on the

-28-

handset.

8. A digital television system comprising a transmission means for transmitting a plurality of television channels and a decoder for receiving the plurality of channels and characterised in that one channel is used to carry audiovisual information regarding programmes or services available on at least some of the other channels, the decoder being adapted to generate and display interactive messages superimposed over and synchronised with the information regarding said at least some of the other channels.

10

9. A digital television system as claimed in claim 8 in which the decoder is adapted to change to another channel in response to a positive reply by a user to an interactive message.

15

10. A digital television system as claimed in claim 8 or 9 in which the decoder is further adapted to change to a predetermined display screen of a service channel in response to a positive reply to an interactive message.

20

11. A digital television system as claimed in any of claims 8 to 10 in which the decoder is adapted to carry out payment steps in response to a positive reply by a user to an interactive message.

25

12. A digital television system as claimed in any of claims 8 to 11 in which the decoder is adapted when tuned to the guide channel to permanently display a service menu providing access to the channels and service channels received by the decoder.

13. A digital television system as claimed in claim 12 in which the decoder is adapted to display the service menu in an inactive form.

30

14. A digital television system comprising a combination of any of claims 1 to 7 and any of claims 8 to 13.

-29-

15. A method of accessing at least one of a plurality of channels comprising a channel and a service channel of a digital television system, said method comprising the steps of:
- displaying a service menu;
  - 5 accessing at least one subsidiary menu by the service menu; and
  - accessing said at least one of a plurality of channels by said at least one subsidiary menu.
16. A method as claimed in claim 15 wherein access to said at least one of a plurality of channels proceeds via at least a second subsidiary menu accessible via at least one first subsidiary menu.
17. A method as claimed in claim 15 or 16 wherein a service channel is accessed at a particular display screen within that service channel in dependence on the option  
15 chosen within a subsidiary menu.
18. A method as claimed in any of claims 15 to 17 wherein the service menu and at least one subsidiary menu is displayed superimposed over information transmitted on at least one of a plurality of channels.  
20
19. A method as claimed in claim 18 wherein said at least one service menu further comprises regularly updated information broadcast together with the channel information over which the menus are superimposed.
20. A method as claimed in claim 19 wherein update information for said at least one service menu is broadcast on substantially all channels and service channels.  
25
21. A method as claimed in any of claims 15 to 20 wherein the service menu is displayed in response to the touch of a single dedicated key on a remote control  
30 handset.
22. A method of providing information access in a digital television system, said

-30-

method comprising the steps of:

receiving a plurality of television channels, one channel being used to carry audiovisual information regarding one of programmes and services available on at least some of the other channels; and

5 generating and displaying interactive messages superimposed over and synchronised with the information regarding said at least some of the other channels.

23. A method as claimed in claim 22 comprising the step of changing to another channel in response to a positive reply by a user to an interactive message.

10

24. A method as claimed in claim 22 or 23 comprising the step of changing to a predetermined display screen of a service channel in response to a positive reply to an interactive message.

15 25. A method as claimed in any of claims 22 to 24 wherein payment steps are carried out in response to a positive reply by a user to an interactive message.

26. A method as claimed in any of claims 22 to 25 wherein a service menu is displayed permanently to provide access to the received channels and service  
20 channels.

27. A method as claimed in claim 26 wherein the service menu is displayed in an inactive form.

25 28. A digital television system substantially as herein described.


29. A method of accessing at least one of a plurality of channels substantially as herein described.

30 30. A method of providing information access in a digital television system substantially as herein described.



1/12

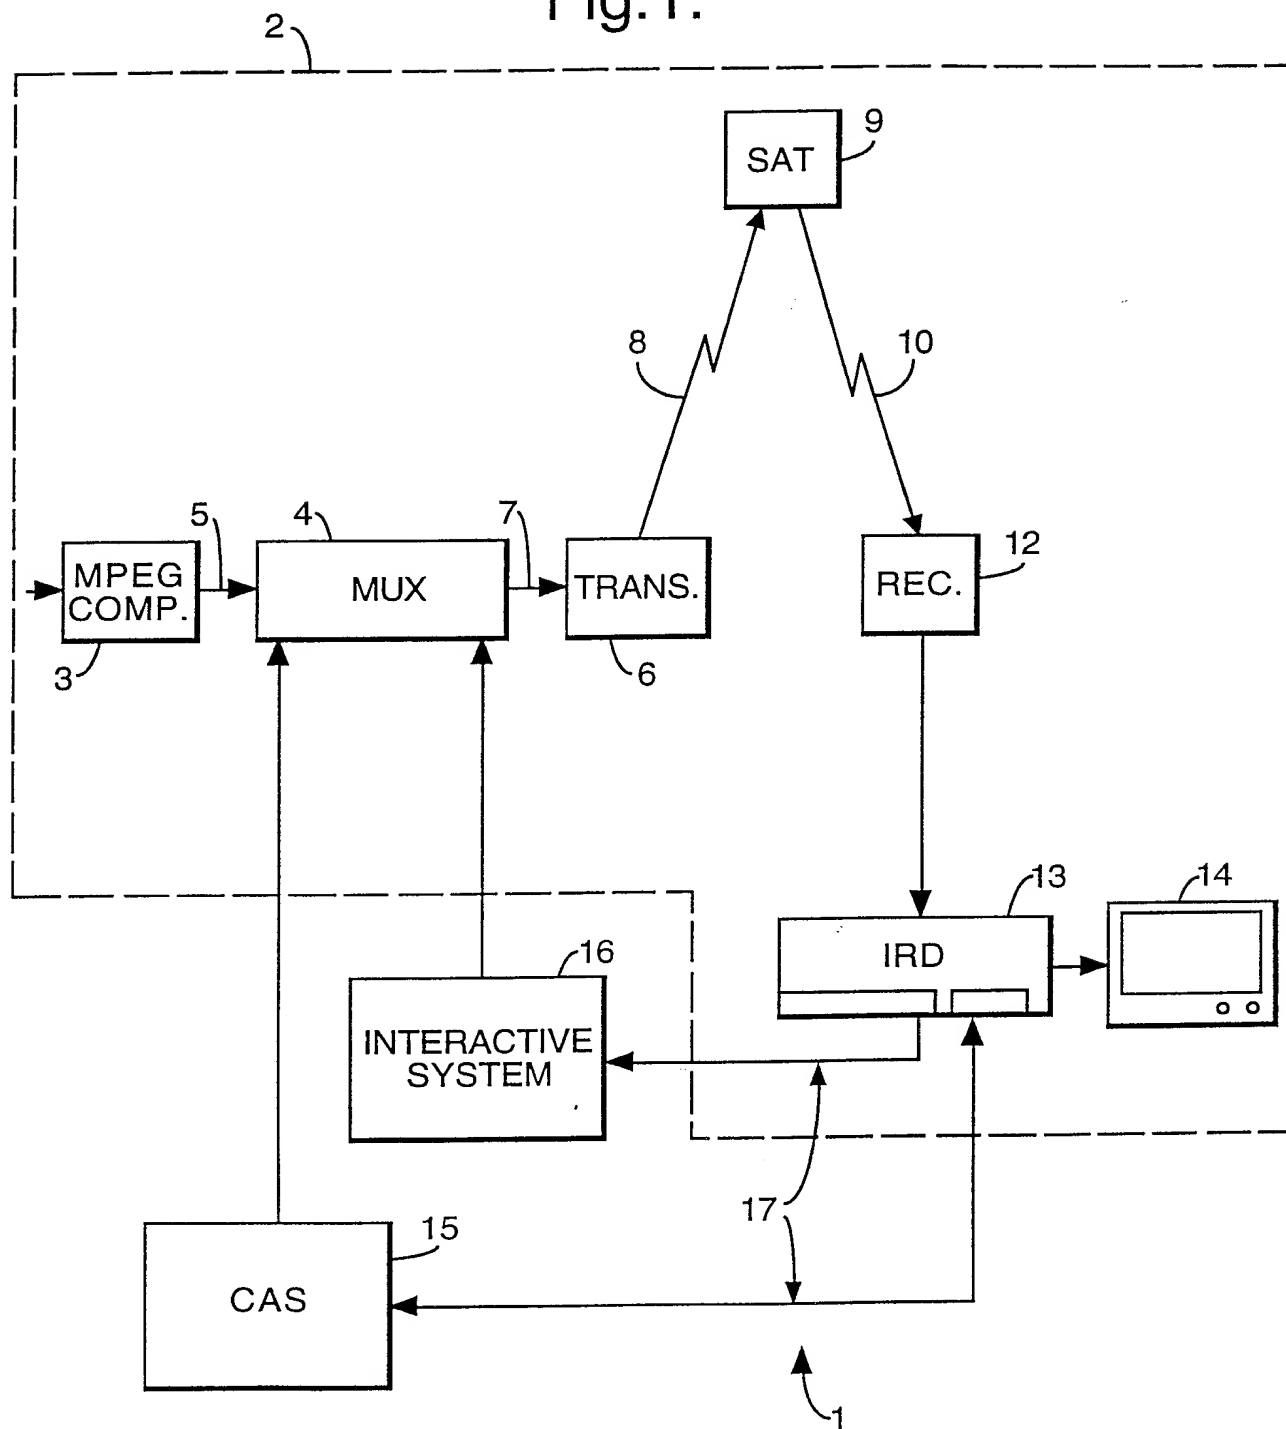Fig.1.



2/12

Fig.2.



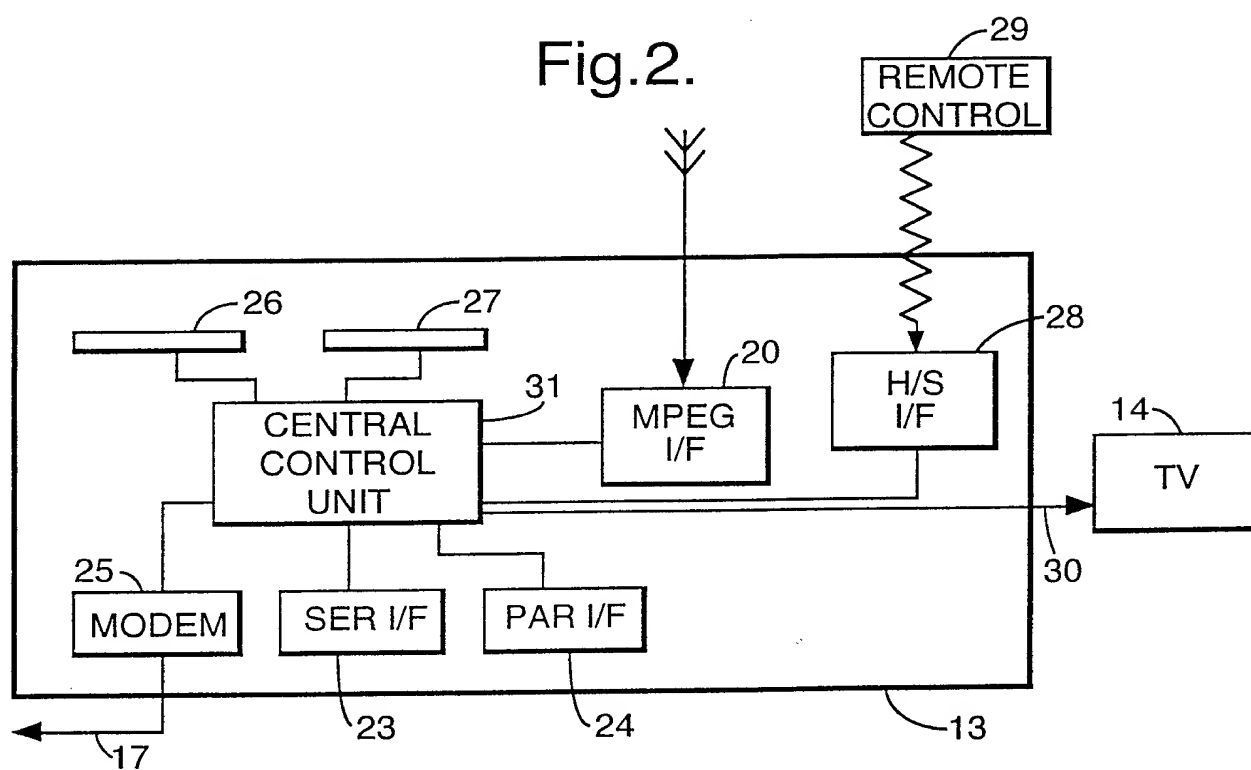


Fig.3.

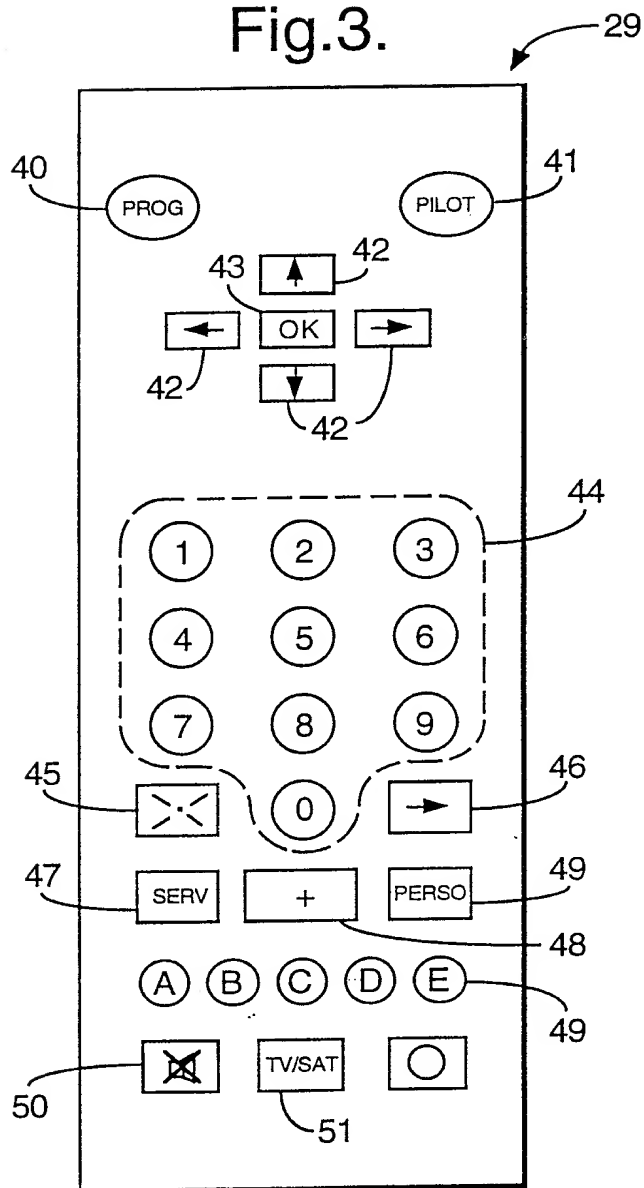


4/12

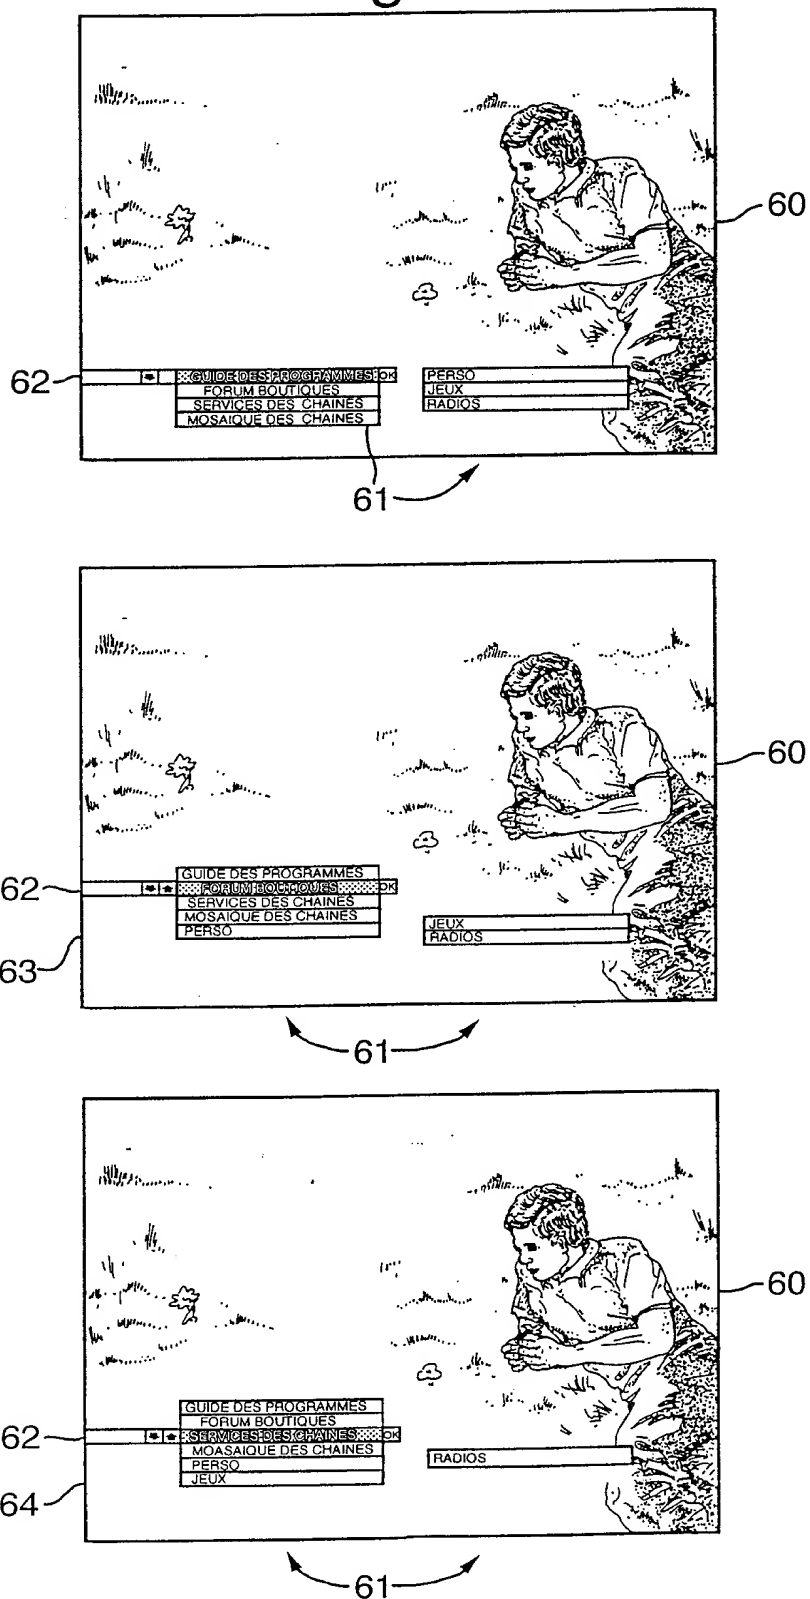Fig.4.




5/12

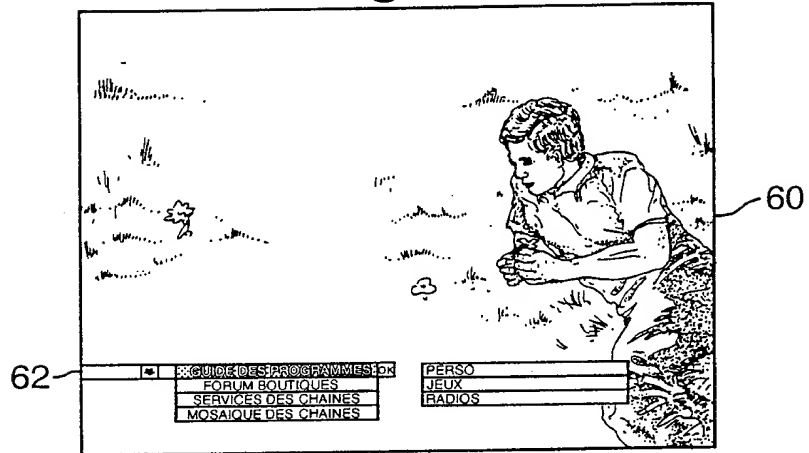
Fig.5.



61

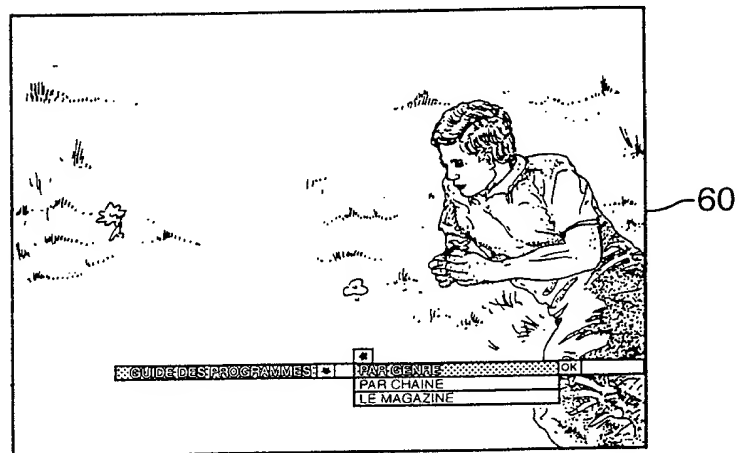


65

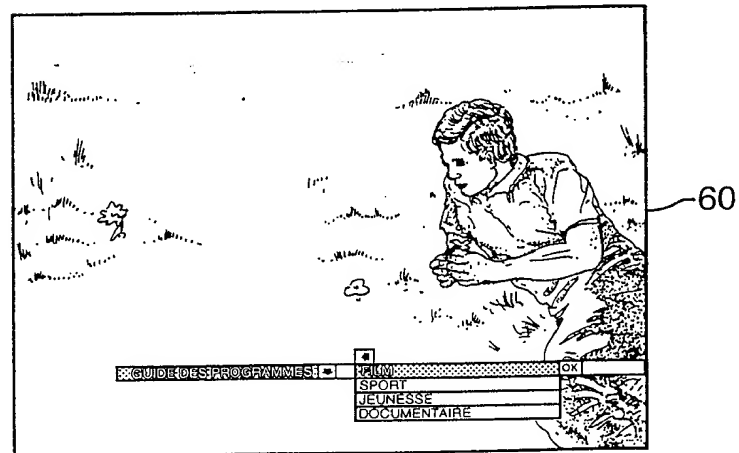


66

6/12

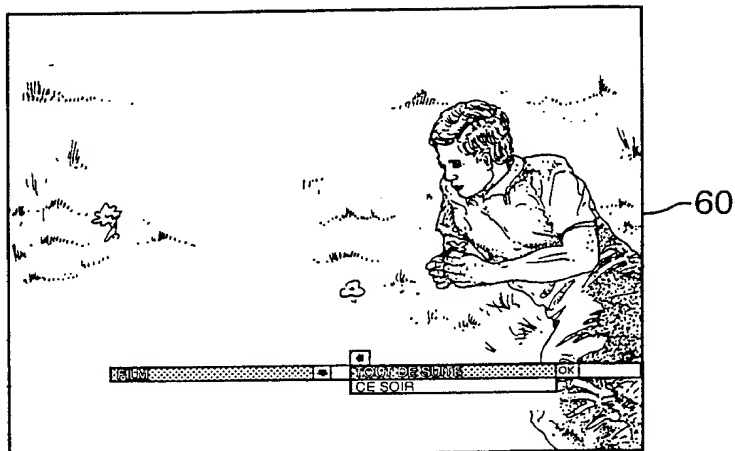
Fig.6.



67

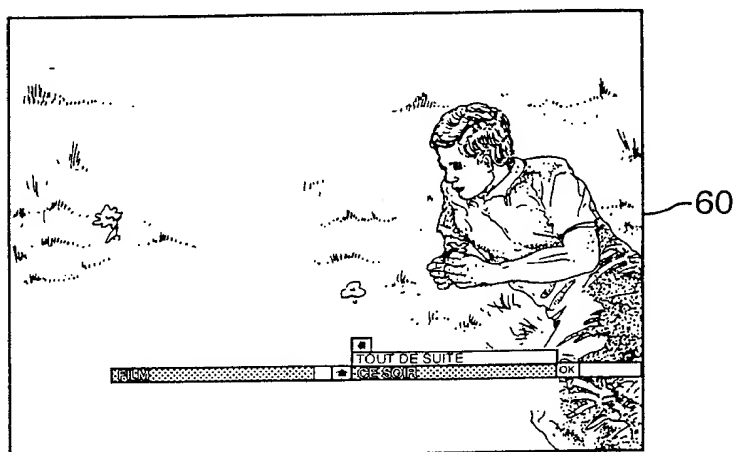


68

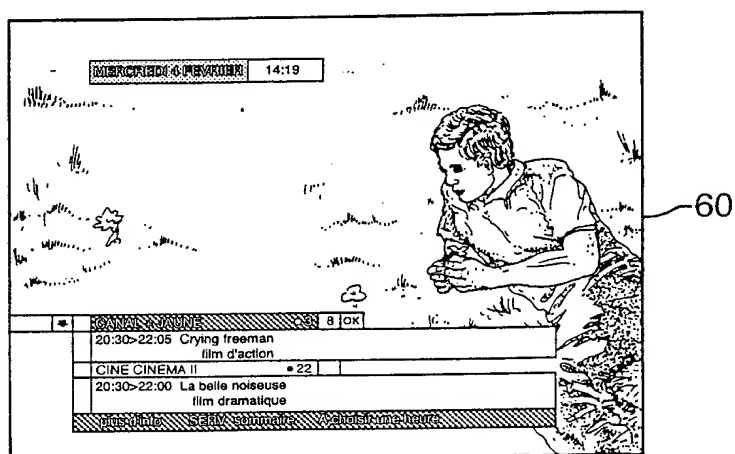


69

7/12

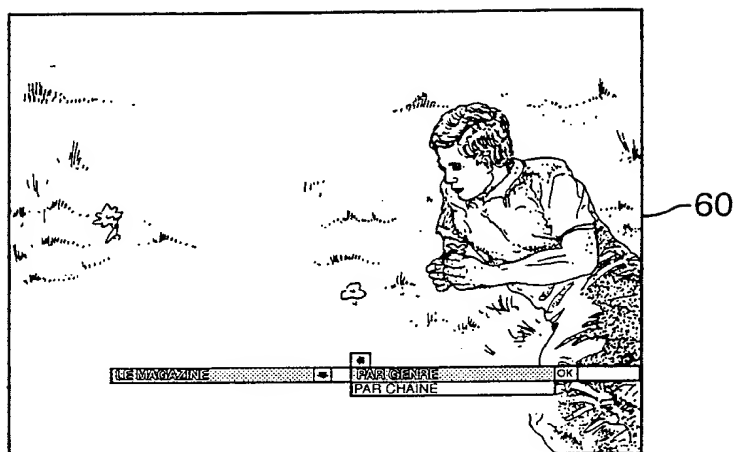
Fig. 7.



70

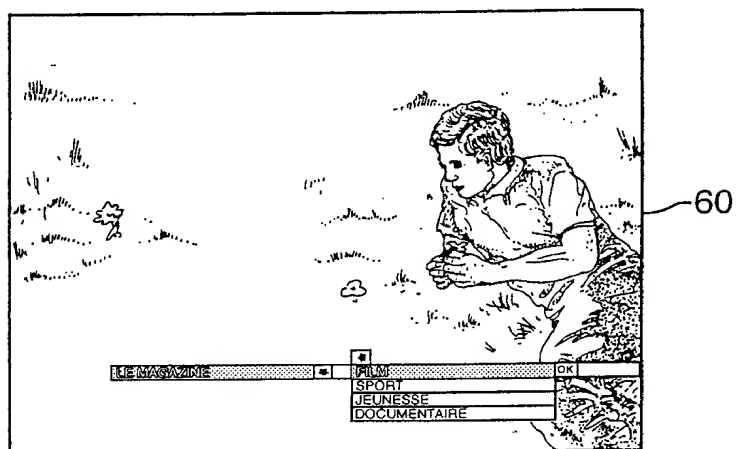

71

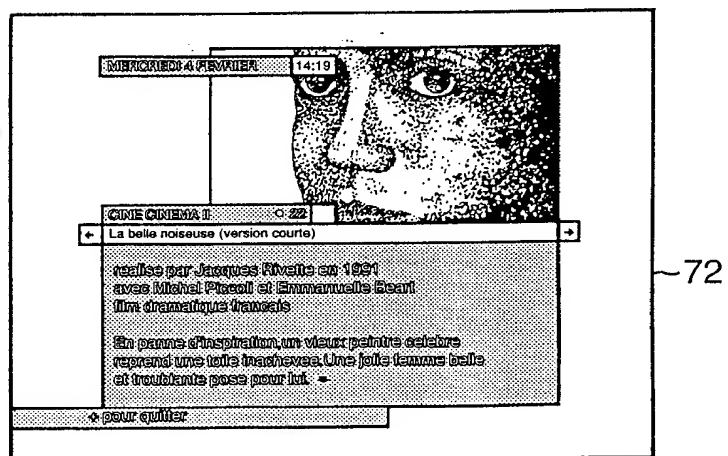

72

FIG. 8A

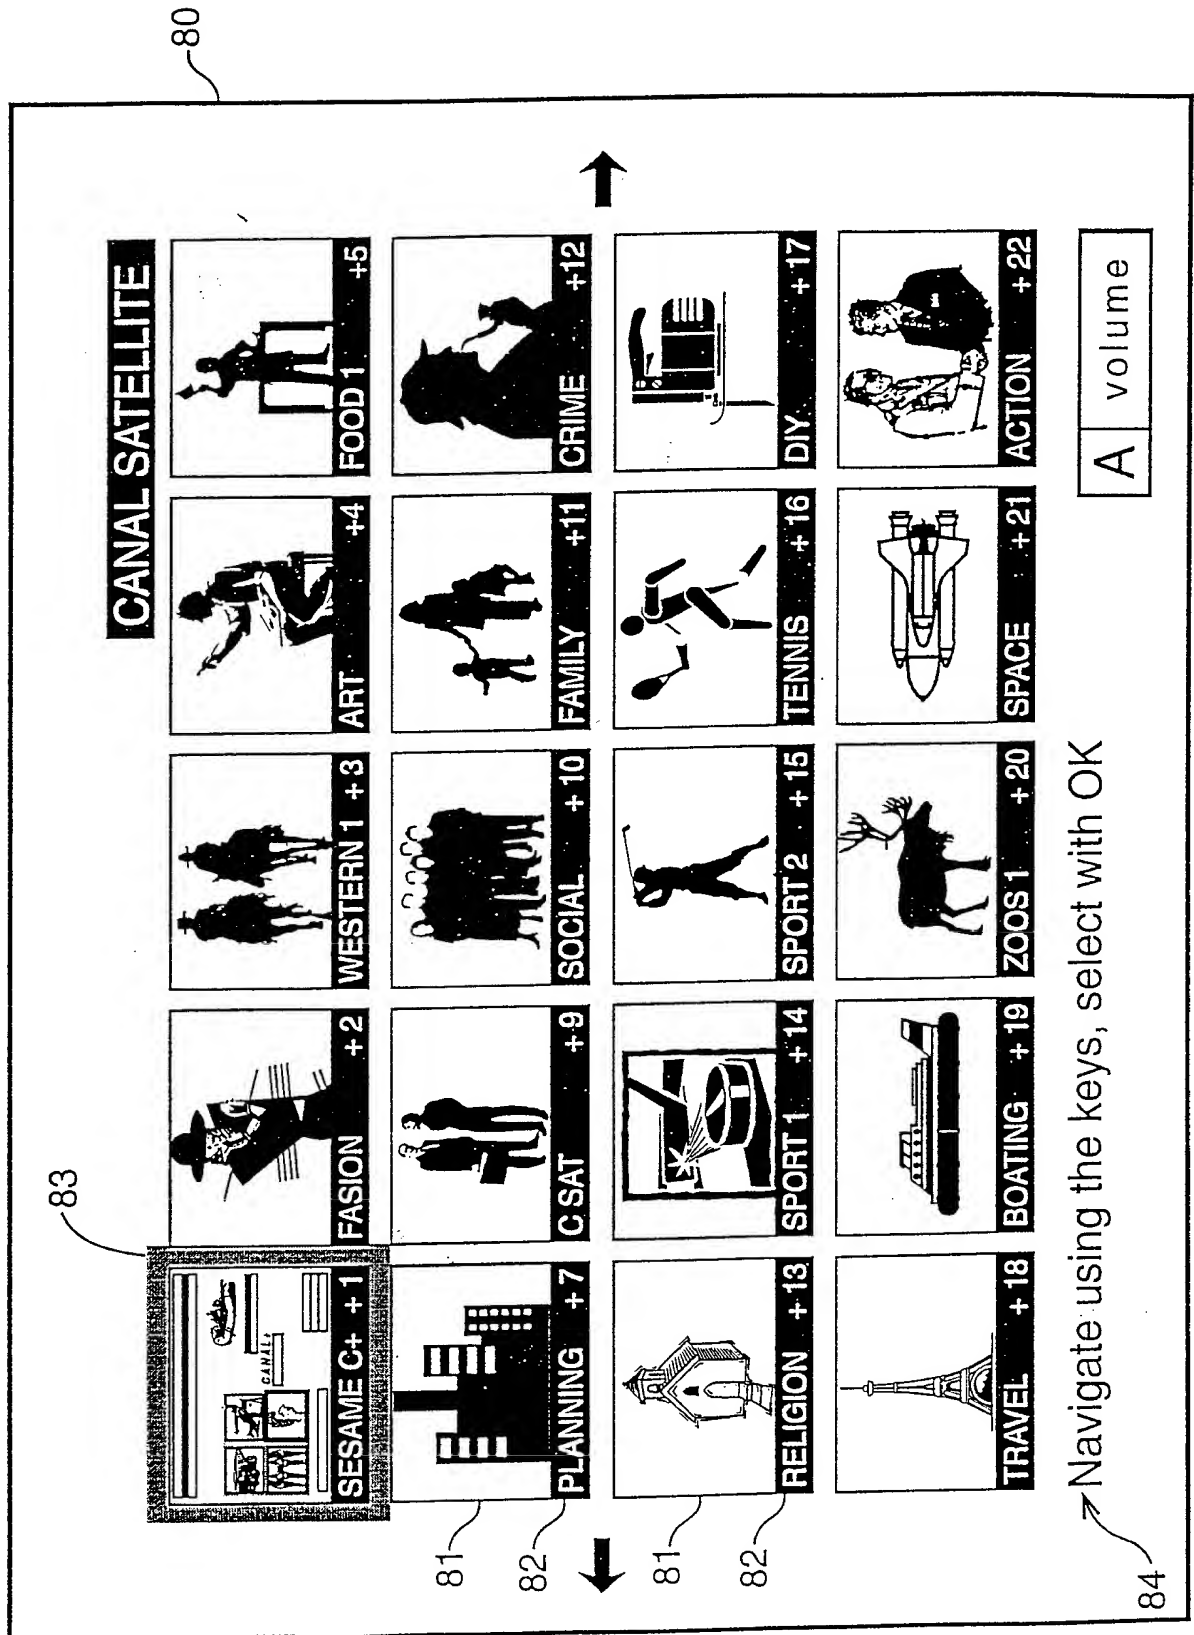
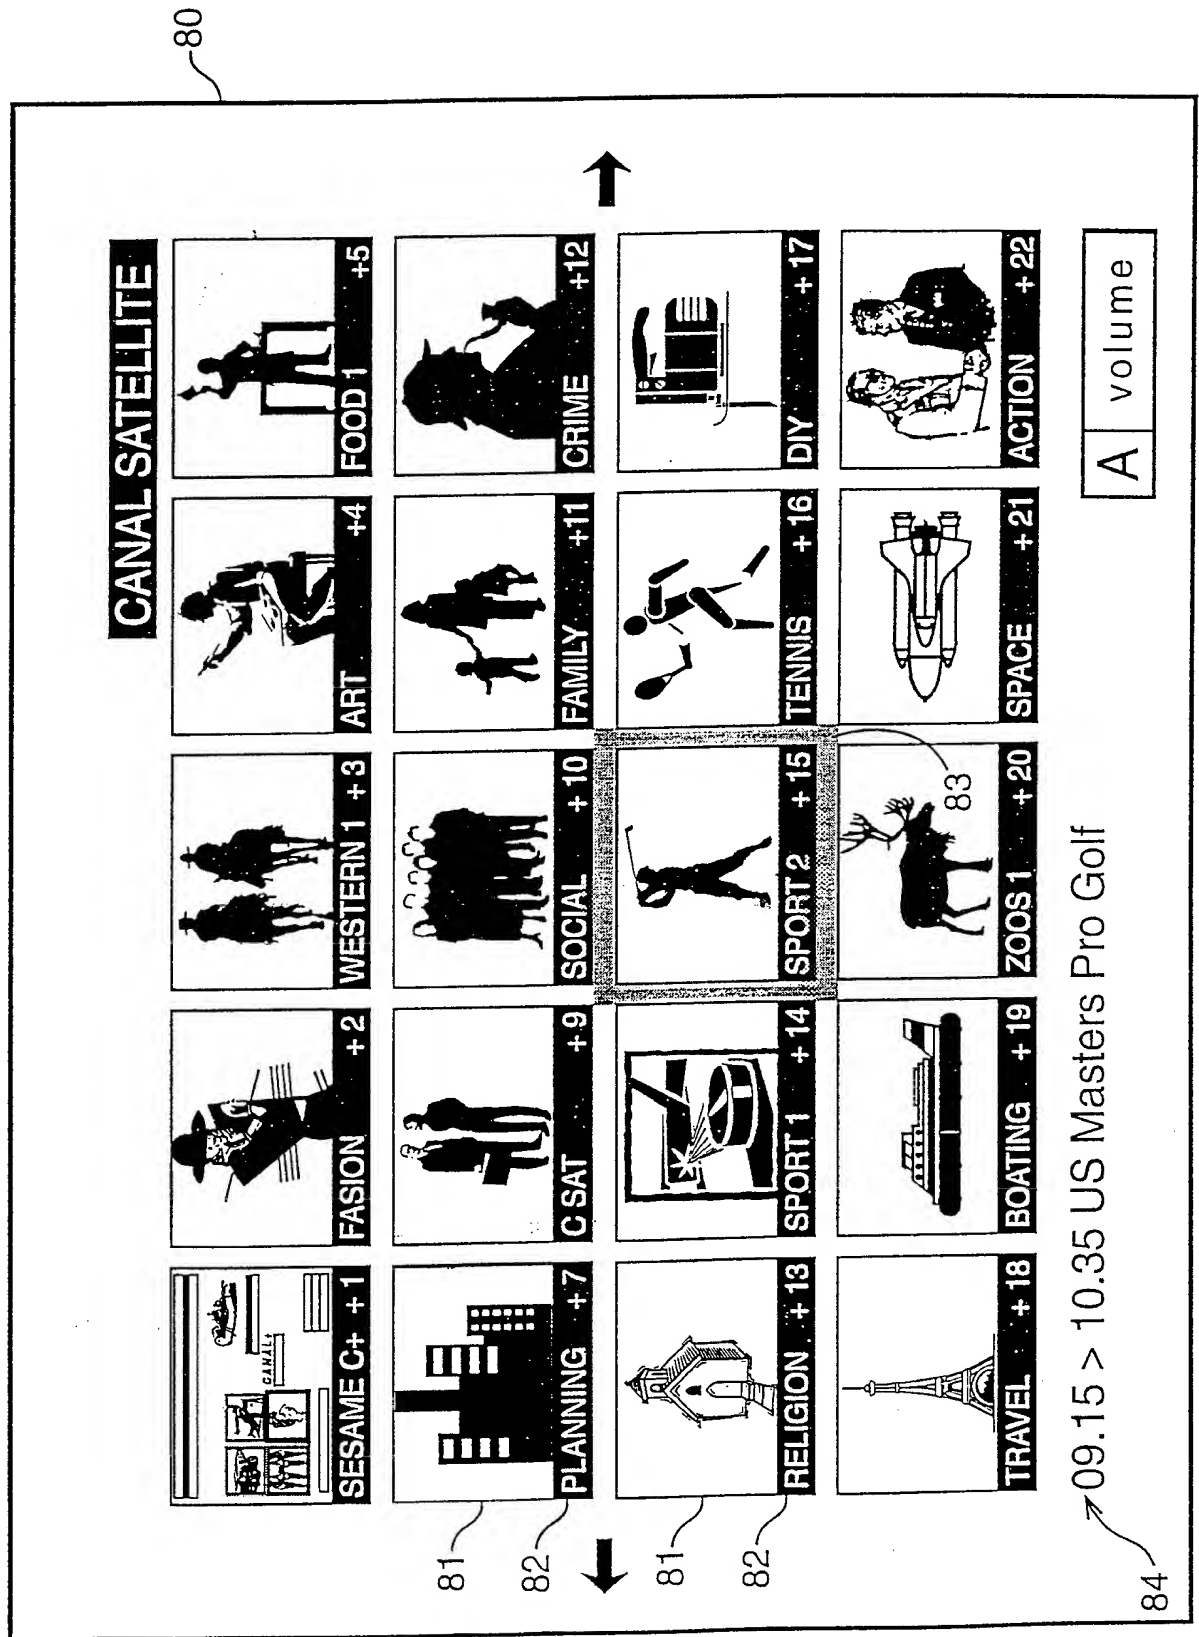


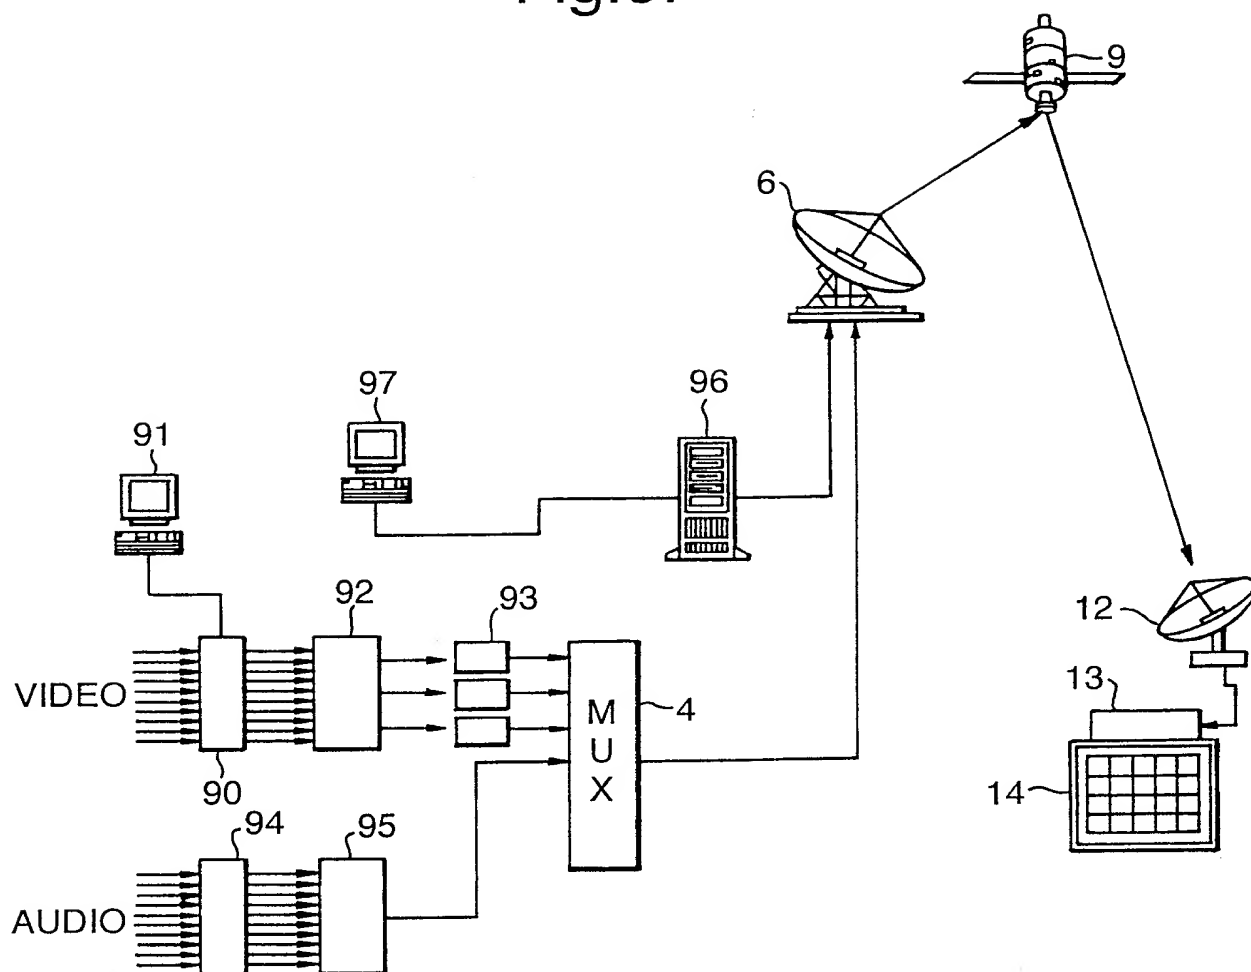


FIG. 8B



10/12

Fig.9.



11/12

Fig.10.


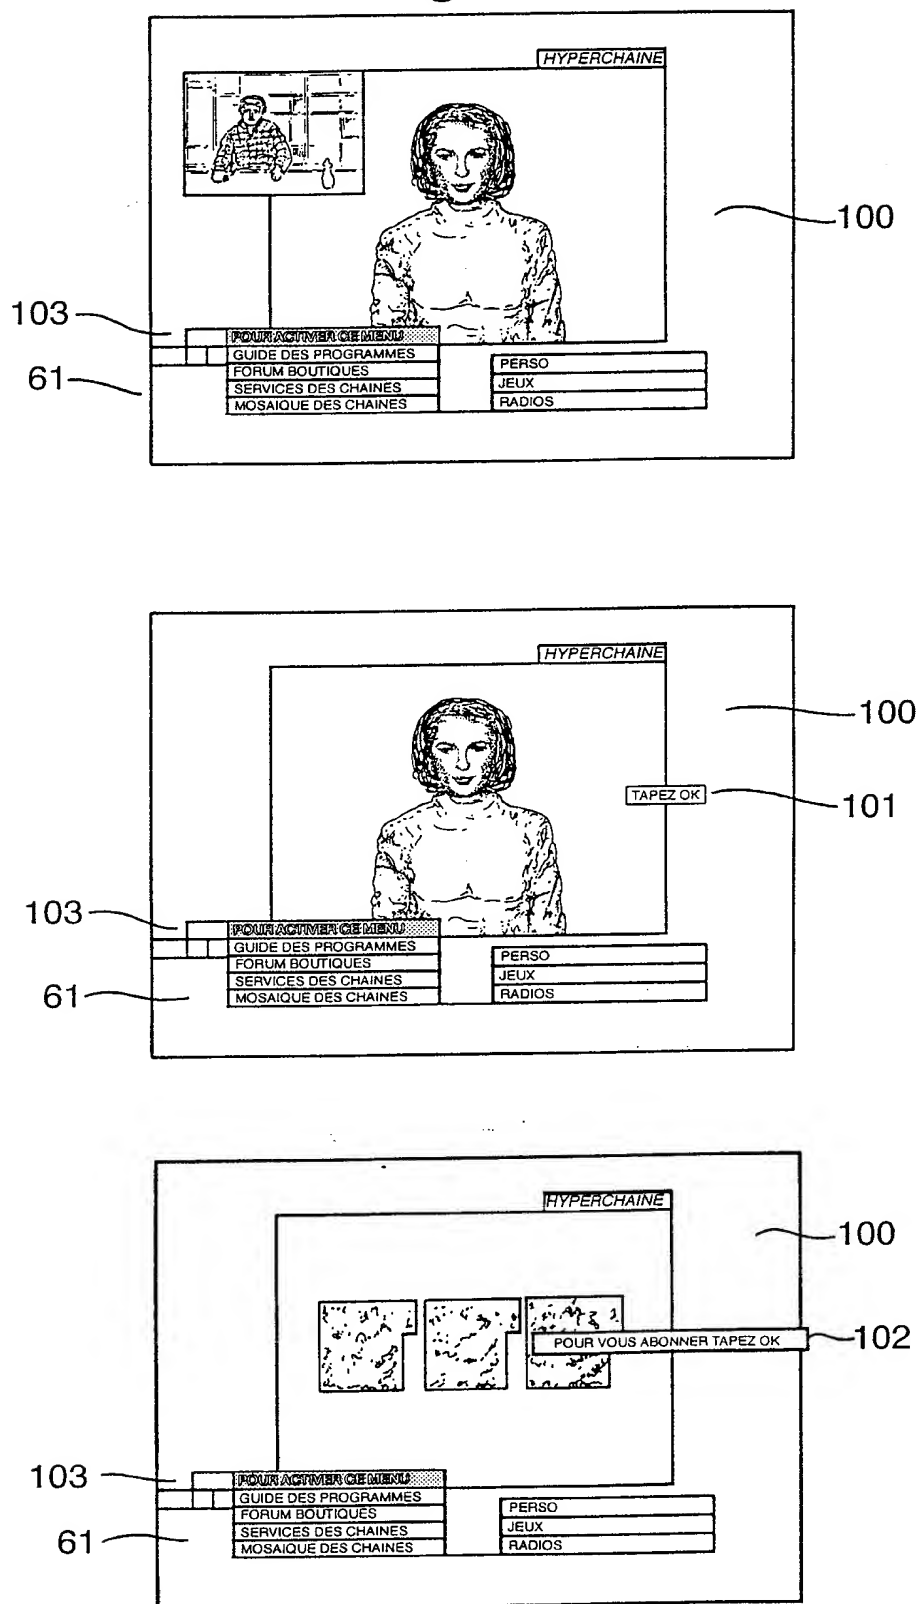


Fig.11.

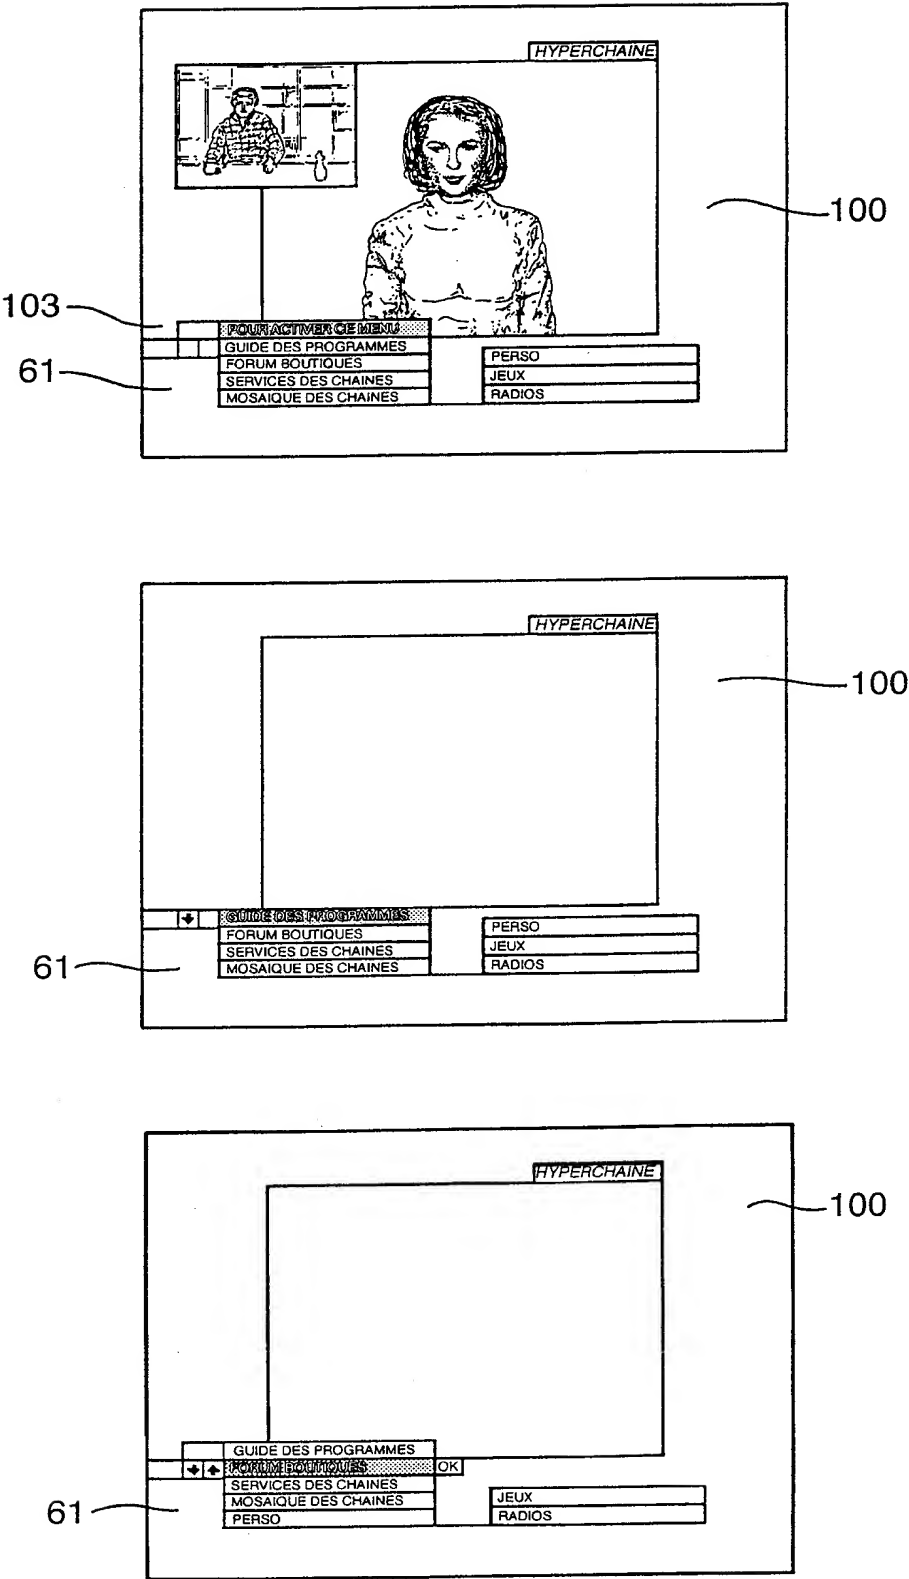

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 99/01350

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/16 H04N5/445 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 585 866 A (DARATA PAUL ET AL) 17 December 1996 (1996-12-17) column 10, line 36 - line 60 column 11, line 62 - column 12, line 10 column 13, line 31 - line 54 column 14, line 63 - column 15, line 20 column 18, line 26 - line 48 column 28, line 38 - column 30, line 10 column 31, line 35 - line 46 ---	1,3-12, 15,17-30
A	WO 97 42763 A (SCHEIN STEVEN ;KLOSTERMAN BRIAN L (US); STARSIGHT TELECAST INC (US) 13 November 1997 (1997-11-13)  page 13, line 22 - line 25 page 16, line 12 - line 25 ---  -/--	1-3, 8-10, 15-17, 22-24, 28-30

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

11 November 1999

Date of mailing of the international search report

17/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Sindic, G

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 99/01350

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 746 152 A (IBM) 4 December 1996 (1996-12-04)  page 24, line 27 - line 57 page 26, line 13 - line 23 ----	1-4, 7, 15-19, 26, 28-30
A	WO 97 02701 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 23 January 1997 (1997-01-23) page 6, line 3 - line 11 page 9, line 14 - line 17 page 12, line 9 - line 12 page 15, line 1 - line 8 ----	1-4, 15-19, 28-30
A	US 5 574 494 A (MARICS MONICA A) 12 November 1996 (1996-11-12)  column 1, line 39 - line 48 column 4, line 53 - line 67 column 5, line 34 - line 39 column 6, line 5 - line 19 ----	1-3, 7, 15-18, 21, 28-30
A	"INTEGRATED AUDIO-GRAPHICS USER INTERFACE" IBM TECHNICAL DISCLOSURE BULLETIN, vol. 33, no. 11, 1 April 1991 (1991-04-01), pages 368-371, XP000110434 page 370, paragraph 2 -----	1, 2, 15, 16

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 99/01350

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5585866 A	17-12-1996	US 5781246 A AU 705839 B AU 6092996 A CA 2223018 A EP 0830787 A PL 323830 A WO 9641477 A US 5589892 A US 5822123 A	14-07-1998 03-06-1999 30-12-1996 19-12-1996 25-03-1998 27-04-1998 19-12-1996 31-12-1996 13-10-1998
WO 9742763 A	13-11-1997	AU 3058397 A CA 2253293 A EP 0896775 A US 5940073 A	26-11-1997 13-11-1997 17-02-1999 17-08-1999
EP 0746152 A	04-12-1996	US 5606374 A JP 8331414 A	25-02-1997 13-12-1996
WO 9702701 A	23-01-1997	AU 701625 B AU 5908796 A BR 9606459 A CA 2198894 A CN 1164948 A EP 0779009 A JP 10505730 T	04-02-1999 05-02-1997 13-01-1998 23-01-1997 12-11-1997 18-06-1997 02-06-1998
US 5574494 A	12-11-1996	NONE	

**DERWENT-ACC-NO:** 2000-195128**DERWENT-WEEK:** 200774*COPYRIGHT 2008 DERWENT INFORMATION LTD*

**TITLE:** Navigation system for a multiple-channel digital TV system with a decoder adapted to display digital TV channels in mosaic formation and receiving and analyzing access rights to determine if access should be granted

**INVENTOR:** AGASSE B

**PATENT-ASSIGNEE:** THOMSON LICENSING SA[CSFC] , CANAL+ SA  
[CANAN] , CANAL+ TECHNOLOGIES [CANAN]

**PRIORITY-DATA:** 1998EP-401837 (July 20, 1998)**PATENT-FAMILY:**

<b>PUB-NO</b>	<b>PUB-DATE</b>	<b>LANGUAGE</b>
WO 0005886 A1	February 3, 2000	EN
AU 9947940 A	February 14, 2000	EN
BR 9912281 A	April 17, 2001	PT
EP 1097583 A1	May 9, 2001	EN
NO 200100301 A	March 20, 2001	NO
CZ 200100244 A3	August 15, 2001	CS
ZA 200100184 A	September 26, 2001	EN
KR 2001053590 A	June 25, 2001	KO
CN 1318254 A	October 17, 2001	ZH
HU 200104305 A2	March 28, 2002	HU
MX 2001000712 A1	August 1, 2001	ES
MX 2001000713 A1	August 1, 2001	ES
JP 2002521926 W	July 16, 2002	JA
EP 1246465 A2	October 2, 2002	EN
AU 755379 B	December 12, 2002	EN
AU 757095 B	January 30, 2003	EN



EP 1097583 B1	September 24, 2003	EN
DE 69911613 E	October 30, 2003	DE
ES 2207953 T3	June 1, 2004	ES
CN 1181685 C	December 22, 2004	ZH
KR 607066 B1	August 1, 2006	KO
KR 610243 B1	August 9, 2006	KO
CA 2336679 C	October 30, 2007	EN

**DESIGNATED-STATES:**

AE AL AM AT AU AZ BA BB BG BR BY CA CH  
 CN CU CZ DE DK EE ES FI GB GD GE GH GM  
 HR HU ID IL IN IS JP KE KG KP KR KZ LC  
 LK LR LS LT LU LV MD MG MK MN MW MX NO  
 NZ PL PT RO RU SD SE SG SI SK SL TJ TM  
 TR TT UA UG US U Z VN YU ZA ZW AT BE CH  
 CY DE DK EA ES FI FR GB GH GM GR IE IT  
 KE LS LU MC MW NL OA PT SD SE SL SZ UG  
 ZW AL AT BE CH CY DE DK ES FI FR GB GR  
 IE IT LI LT LU LV MC MK NL PT RO SE SI  
 AL AT BE CH CY DE DK ES FI FR GB GR IE  
 IT LI LT LU LV MC MK NL PT RO SE SI A L  
 AT BE CH CY DE DK ES FI FR GB GR IE IT  
 LI LT LU LV MC MK NL PT RO SE SI

**APPLICATION-DATA:**

PUB-NO	APPL-DESCRIPTOR	APPL-NO	APPL-DATE
WO2000005886A1	N/A	1999WO- IB01350	July 20, 1999
AU 9947940A	N/A	1999AU- 047940	July 20, 1999
AU 757095B	N/A	1999AU- 047940	July 20, 1999
AU 755379B	N/A	1999AU- 047944	July 20, 1999
BR 9912281A	N/A	1999BR- 012281	July 20, 1999
CA 2336679C	N/A	1999CA- 2336679	July 20, 1999
CN 1318254A	N/A	1999CN- 810876	July 20, 1999

CN 1181685C	N/A	1999CN- 810876	July 20, 1999
DE 69911613E	N/A	1999DE- 611613	July 20, 1999
EP 1097583A1	N/A	1999EP- 931406	July 20, 1999
EP 1097583B1	N/A	1999EP- 931406	July 20, 1999
EP 1097583A1	N/A	1999WO- IB01350	July 20, 1999
BR 9912281A	N/A	1999WO- IB01350	July 20, 1999
NO 200100301A	N/A	1999WO- IB01350	July 20, 1999
CZ 200100244A3	N/A	1999WO- IB01350	July 20, 1999
HU 200104305A2	N/A	1999WO- IB01350	July 20, 1999
JP2002521926W	N/A	1999WO- IB01350	July 20, 1999
EP 1097583B1	N/A	1999WO- IB01350	July 20, 1999
DE 69911613E	N/A	1999WO- IB01350	July 20, 1999
KR 607066B1	N/A	1999WO- IB01350	July 20, 1999
KR 610243B1	N/A	1999WO- IB01356	July 20, 1999
CA 2336679C	N/A	1999WO- IB01350	July 20, 1999
JP2002521926W	N/A	2000JP- 561768	July 20, 1999
CZ 200100244A3	N/A	2001CZ- 000244	July 20, 1999
HU 200104305A2	N/A	2001HU- 004305	July 20, 1999
ZA 200100184A	N/A	2001ZA- 000184	January 8, 2001
NO 200100301A	N/A	2001NO- 000301	January 18, 2001

KR2001053590A	N/A	2001KR- 700886	January 19, 2001
KR 607066B1	N/A	2001KR- 700886	January 19, 2001
KR 610243B1	N/A	2001KR- 700887	January 19, 2001
MX2001000712A1	N/A	2001MX- 000712	January 19, 2001
MX2001000713A1	N/A	2001MX- 000713	January 19, 2001
EP 1246465A2	Based on	2002EP- 008159	July 20, 1999

**INT-CL-CURRENT:**

<b>TYPE</b>	<b>IPC DATE</b>
CIPP	G06F17/30 20060101
CIPP	H04N7/16 20060101
CIPS	G06F3/048 20060101
CIPS	H04N5/445 20060101
CIPS	H04N5/445 20060101
CIPS	H04N7/16 20060101
CIPS	H04N7/173 20060101
CIPS	H04N7/173 20060101
CIPS	H04N7/173 20060101

**RELATED-ACC-NO:** 2000-195129**ABSTRACTED-PUB-NO:** WO 0005886 A1**BASIC-ABSTRACT:**

NOVELTY - A multiplexer (4) receives input signals and transmits compressed digital signals via a line (7) to a transmitter (6), transmitting electromagnetic signals via an up-link (8) towards a satellite transponder (9), where they

are electronically processed and broadcast via a down-link (10) to an Earth dish receiver (12). The received MPEG-2 signals are decoded by a decoder (13) into a TV signal for a TV set (14). A conditional access system (15) enables an end user to access digital TV broadcasts from one or more suppliers and the decoder and a smart card are used to purchase commercial offerings.

DESCRIPTION - INDEPENDENT CLAIMS are included for methods of accessing channels and for providing information access in a digital TV system.

USE - Navigating between channels in digital TV system.

ADVANTAGE - Facilitating navigation of channels while respecting access control restrictions.

DESCRIPTION OF DRAWING(S) - The drawing shows a digital TV system that may be adapted according to the present invention

Multiplexer (4)

Transmitter (6)

Satellite transponder (9)

Dish receiver (12)

Decoder (13)

TV set (14)

Conditional access system (15)

**CHOSEN-DRAWING:** Dwg.1/11

**TITLE-TERMS:** NAVIGATION SYSTEM MULTIPLE CHANNEL DIGITAL  
TELEVISION DECODE ADAPT DISPLAY MOSAIC  
FORMATION RECEIVE ACCESS DETERMINE

**DERWENT-CLASS:** W03

**EPI-CODES:** W03-A13G; W03-A16C3C;

**SECONDARY-ACC-NO:**

**Non-CPI Secondary Accession Numbers:** 2000-144404